




APPLICATION  
ONLY FOR USE BY CERTIFIED SPECIALISTS!

# SENSE BY MACO

## SENSORS FOR SMART HOME APPLICATIONS

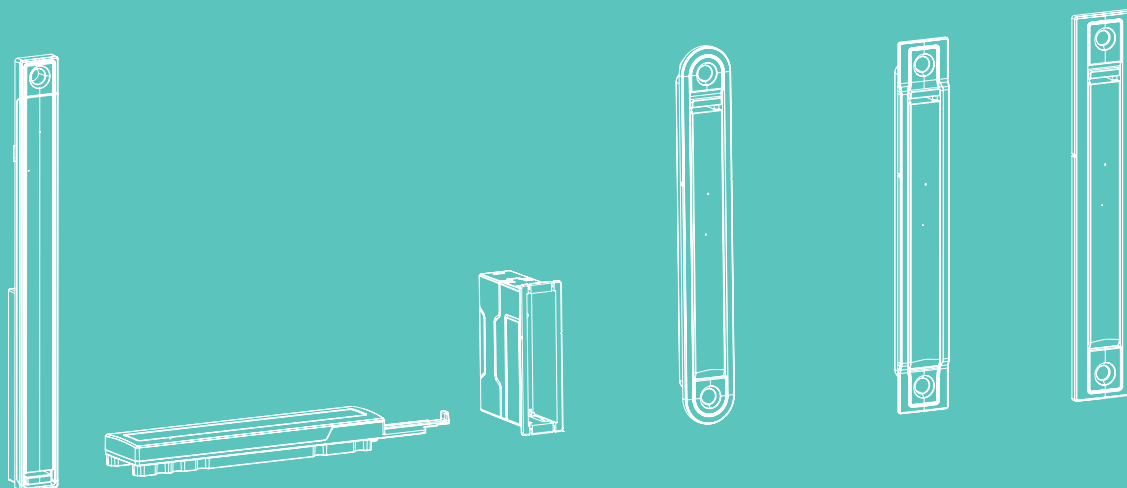

### ASSEMBLY INSTRUCTIONS



matter



BUILT ON  
THREAD

REQUIRES  
BORDER  
ROUTER

**sense**<sup>®</sup>  
by MACO

maco.eu



HOLZ  
PVC  
ALU

## Contents

Important information for use	3
Declaration of conformity	8
Sense by MACO   Window Pro T&T	9
Sense by MACO   Casement	19
Sense by MACO   Door	28
Sense by MACO   Universal	38
Integration into the Smart Home System	51
Troubleshooting	52

## Legend

### LED Signals

-  LED off
-  LED on
-  LED flashes



## Important information for use

### 1. General Information

This document contains important information regarding the planning, installation, commissioning, operation, and maintenance of products from the Sense by MACO family.

Please read this information carefully before starting any related activities.

Keep the installation manual in a safe place and ensure it is accessible to future users.

The manufacturer of the building component is responsible for ensuring compliance with the requirements outlined in this document.

You can find our current General Terms and Conditions in the download section of the MACO website:

<https://www.maco.eu/en-GB/Terms-and-conditions>

### 2. Target Audience

This installation manual is intended for professional users and describes the installation and setup of products from the Sense by MACO family.

### 3. Product Liability

In accordance with the liability defined in the Product Liability Act, the following information must be observed and passed on to the building owner or end user. Failure to comply with this requirement releases MACO from any liability. Improper installation, use that is not in accordance with the agreement or is unusual, the use of system accessories not explicitly approved by MACO, modifications or repair work not expressly authorised by MACO, as well as unprofessional servicing, may lead to malfunctions and must be avoided. Any actions not expressly approved by MACO will result in the loss of all liability, warranty, and any separately agreed guarantee claims.

### 4. Product Description and Terminology

Products from the Sense by MACO family are wireless sensors designed for concealed installation in the rebate area of window, sliding, and door systems made of PVC, wood, aluminium, or combinations of these materials.

Detects the locking status (open/closed) of the element. Designed for integration into smart home systems via the Matter-over-Thread protocol. A Thread border router and the proper functioning of the smart home system are essential prerequisites for the reliable operation of the wireless sensors – responsibility for this lies with the end user. The product is intended exclusively for use in residential areas, commercial premises, and small businesses.

Products from the Sense by MACO family are designed for seamless compatibility with fittings from the MACO Group. Compatibility with fittings from other manufacturers cannot be guaranteed. Sense by MACO products are sensitive electronic devices. To ensure proper operation, the rebate areas must be ventilated in such a way that the sensors are not exposed to direct moisture or condensation.

## 5. Intended Use

When planning windows, doors, or large surfaces for Sense by MACO products, please refer to MACO's planning specifications and all relevant international and national regulations, laws, standards, and guidelines.

In particular, please observe the following specifications and limitations during planning:

- › The sensors are intended for installation in vertically mounted front doors, apartment doors, secondary entrance doors, windows, and sliding elements made of PVC, wood, aluminium, or steel, as well as combinations of these materials.
- › For installation scenarios where a potential malfunction could pose a risk to life or limb, it is recommended to carry out a functional check of the Sense by MACO system at least once a month.
- › The sensors are not suitable for use in rooms with high dust levels, corrosive atmospheres, high electrostatic charge, or damp environments.
- › The sensors are not suitable for use in building elements made from acidic woods (e.g. Accoya).

Please observe the following instructions during installation:

- › The installation of products from the Sense by MACO family requires special care and must therefore only be carried out by qualified, trained personnel in accordance with the installation manual. MACO accepts no liability or warranty for damage resulting from incorrect installation.
- › Use only undamaged components. Do not install parts showing signs of damage or wear.
- › After installation, the proper functioning of the Sense by MACO products must be verified using the installation manual provided by MACO.
- › To ensure the proper functioning and operational safety of Sense by MACO products over the long term, the instructions in Chapter 8 (Maintenance, Cleaning & Care) must be strictly followed.





## 6. Safety Instructions



### CAUTION

#### **Magnetic Field!**

Magnets can endanger and damage electronic and mechanical components.

- › Remove such objects from the installation area.



### CAUTION

#### **Risk of Falling When Working at Heights!**

There is a risk of falling during installation, cleaning, and maintenance work carried out at height. Do not install the product if the installation position is 1.50 m above the ground and you do not have a ladder.

- › When working above 1.5 metres, use a ladder or step stool. Be sure to follow the safety instructions for the proper use of ladders and step stools.



### CAUTION

#### **Risk of injury due to unsuitable components!**

Use only components approved for the intended application. The use of incorrect or incompatible parts may result in malfunction or personal injury.

- › Use only original parts or components that meet MACO specifications.



### CAUTION

#### **Risk of Injury Due to Improper Handling of the Battery!**

Improper handling of the battery may cause damage to the sensor and injury to the user. Use only the battery type specified for the respective model.

- › Keep the battery area away from flames, sparks, or open fire. Do not burn the battery or expose it to temperatures beyond the permitted range.
- › Do not attempt to cut open the battery or subject it to excessive pressure.
- › Replace the battery immediately if any damage is detected.

## 7. Notes



### NOTE

#### Risk of unauthorized access to the smart home system

An unsecured smart home system or outdated firmware makes unauthorised access easier. Always install the latest firmware to ensure security. Use a strong password and do not share it with third parties.



### NOTE

#### Damage caused by environmental factors

Use in environments with heavy dust exposure, corrosive atmospheres, high electrostatic discharge, or high humidity will damage the product. Installation in components made of acid-containing woods (e.g. Accoya) is not permitted. Installation in rebate areas exposed to direct moisture or condensation is not permitted.



### NOTE

#### Damage caused by contamination

Contamination by oil, grease, or dust as well as contact with water must be strictly avoided. If contaminated, clean the sensor carefully using a soft, lint-free cloth.



### NOTE

#### Malfunction due to lack of maintenance of components

If components are not calibrated or maintained according to specifications, this may lead to issues with correct status detection or signalling. It is therefore recommended to have the respective component inspected or serviced by a qualified specialist before commissioning the sensor.



### NOTE

#### Damage to the housing

Do not use power tools to fasten the sensor, as excessive tightening torque may damage the housing.



### NOTE

#### Battery-powered device

The products in the Sense by MACO family are battery-powered. The average battery life is approximately 2 years and may vary depending on several factors, such as the battery manufacturer, the selected smart home ecosystem, or the number of operations performed on the element. To ensure proper operation, the battery level must be checked regularly. The sensor transmits its battery status to the respective smart home ecosystem. The way this information is displayed depends on the system provider and is beyond MACO's control.



## 8. Maintenance, Cleaning and Care

Your building component is equipped with a high-quality and durable MACO product. To ensure it remains functional and safe for many years, the maintenance instructions and specified intervals must be observed and followed. Perform regular functional checks (at least once per year; in safety-critical applications, at least once per month) to ensure they are functioning correctly. Check for unusual noises, signs of wear, or abrasion that may indicate malfunction.

## 9. Spare Parts, Customer Service and Disposal



Spare parts and customer service can be obtained from suppliers, manufacturers, or authorised service partners. A list of processors, dealers, and service partners can be found at [www.maco.eu](http://www.maco.eu)

The adjacent symbol indicates that this electrical or electronic device must not be disposed of with household waste at the end of its service life, in accordance with the Waste Electrical and Electronic Equipment (WEEE) Directive.

Free collection points for electronic waste are available near you. You can obtain the addresses from your local city or municipal authority.

## Declaration of conformity

Declarations of conformity are accessible via the following QR codes:



EU-Declaration of Conformity  
Sense by MACO | Window T&T



EU-Declaration of Conformity  
Sense by MACO | Door



EU-Declaration of Conformity  
Sense by MACO | Window Pro T&T




EU-Declaration of Conformity  
Sense by MACO | Universal



EU-Declaration of Conformity  
Sense by MACO | Casement

# Sense by MACO | Window Pro T&T

## Overview

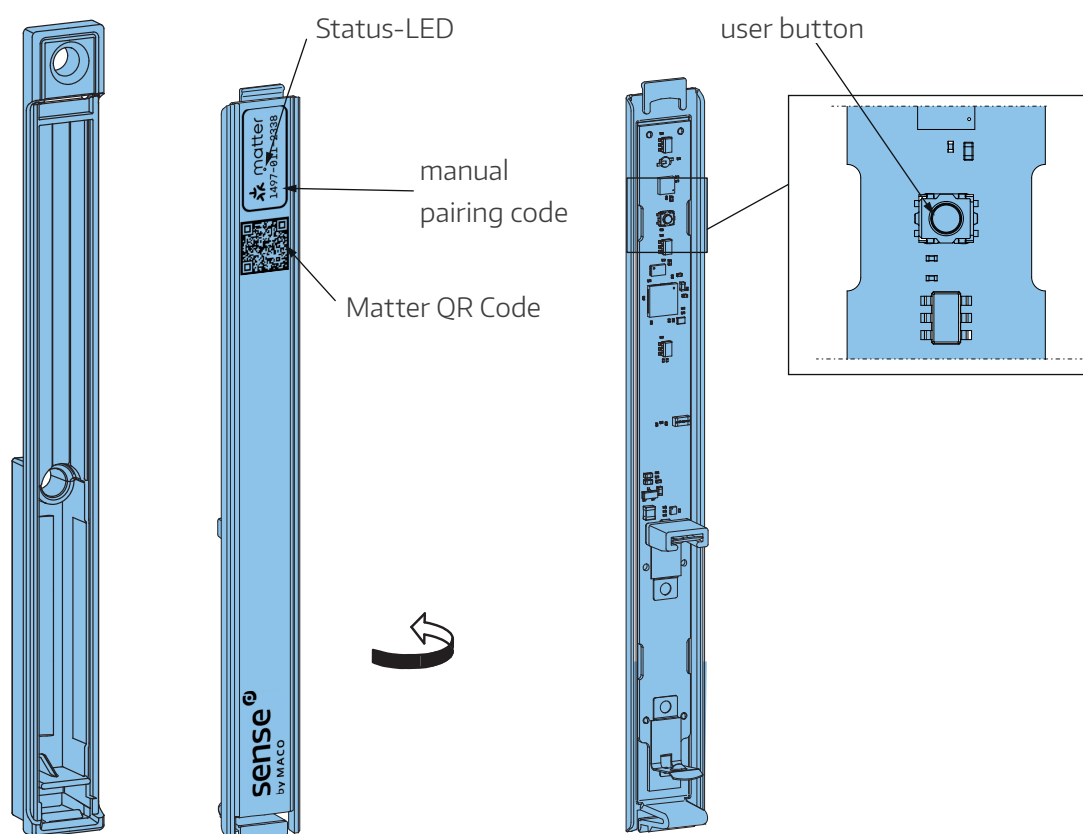


## Content

Overview .....	9
Package Contents .....	10
Mounting .....	11
(Initial) Start-up .....	14
Insert the battery .....	14
Calibration .....	15
Reset .....	16
Soft Reset .....	16
Hard Reset .....	17
Datasheet .....	18

## Package Contents

Pos. no.	Name	Qty.
①	Housing	1
②	Sense by MACO   Window Pro T&T	1
③	Magnet holder	1
④	Package insert	1

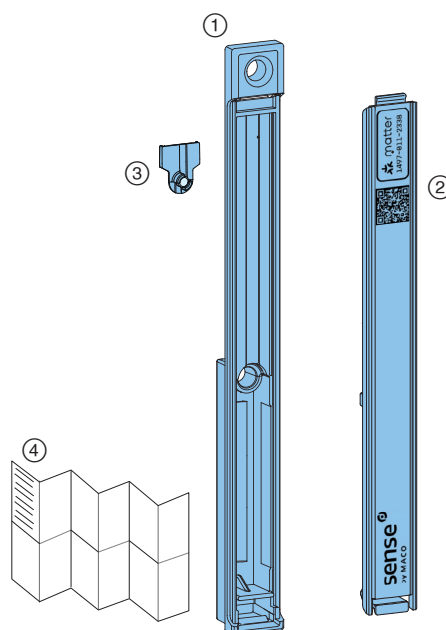


## Required (not included in delivery)

Name	Qty.
Battery AAA 1.5 V	1



## Tools

Name
Cordless drill
Drill bit Ø 3 mm
Screwdriver
Pencil

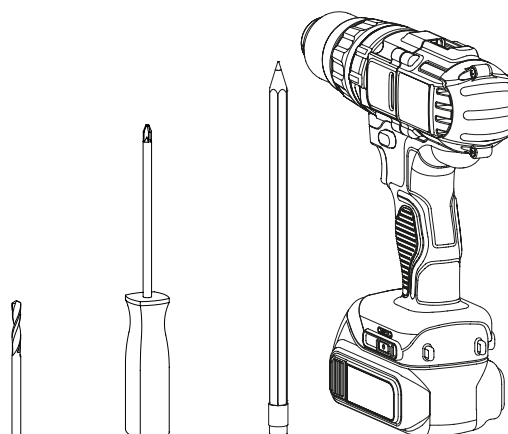

**NOTE**


Do not use power tools to fasten the sensor, as excessive tightening torque may damage the housing.



## Mounting

### Mounting position

Sense by MACO | Window Pro T&T is connected to the last component of compatible MACO MULTI MATIC tilt and turn hardware. This requires either a corner drive or an extendable centre lock, as well as sufficient space in the hardware groove.

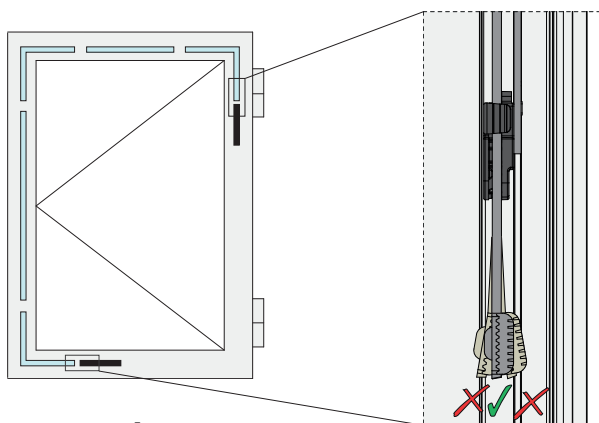

### Legend

— Fitting


— Sense by MACO | Window Pro T&T



### NOTE


#### Examine the fitting at its intended mounting position.

It is essential to verify that the drive track operates with linear movement. A drive track that is overly bent at the mounting position risks damage to the sensor or can lead to incorrect operation. To avoid sensor damage, ensure no section of the drive track protrudes beyond the support surface of the rebate within the fitting groove. Likewise, the drive track must not be bent too sharply into the fitting groove, as this can compromise the sensor's proper function. If necessary, carefully correct the extension movement of the drive track by hand.

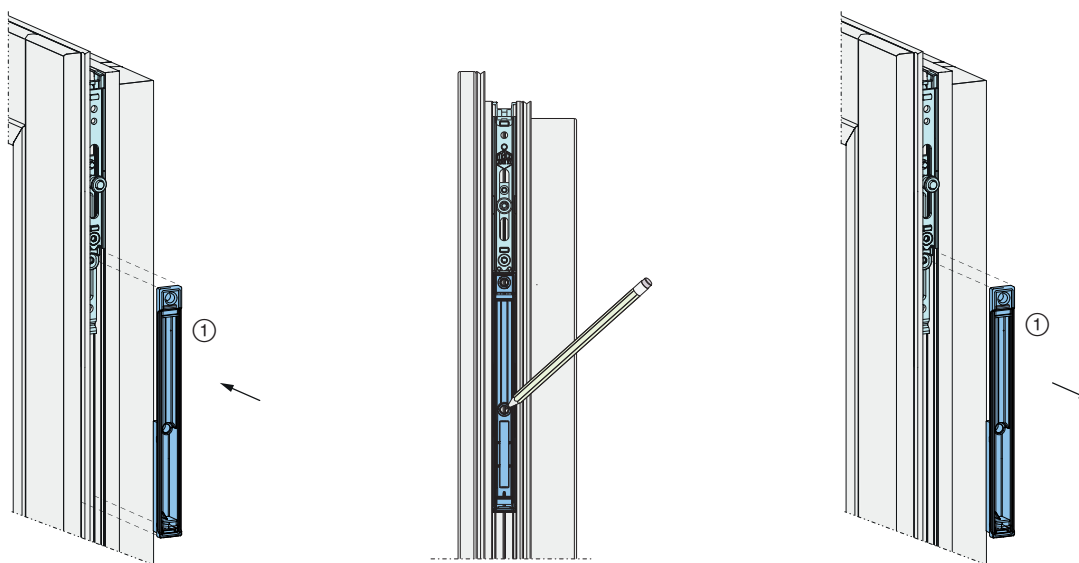


① Position the housing on the open sash and mark the drill holes.

## Mounting position (continued)

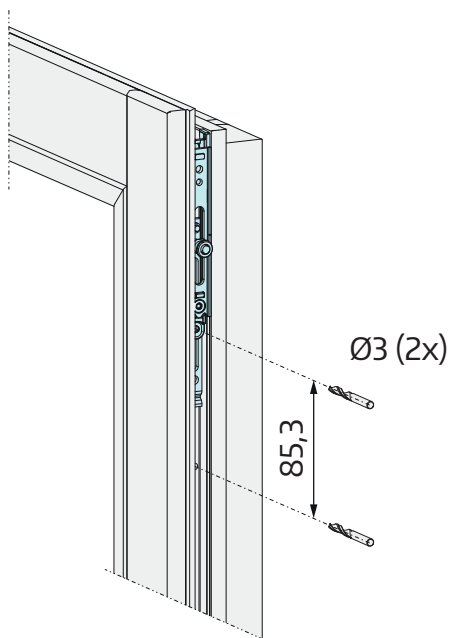

- 2 Pre-drill the holes using a Ø3 mm drill bit.

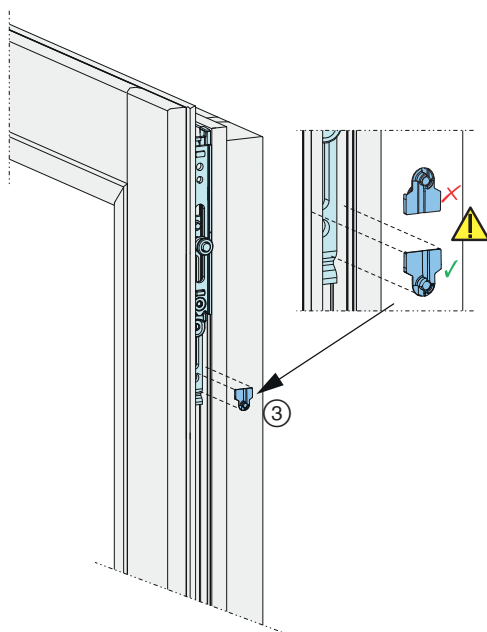

- 3 Insert magnet holder ③ into the unused hole of the corner drive or the extendable centre lock. Ensure the magnet holder is positioned correctly—incorrect installation may lead to detection errors.


### CAUTION

#### Magnetic Field!


Magnets can endanger and damage electronic and mechanical components.

› Remove such objects from the installation area.



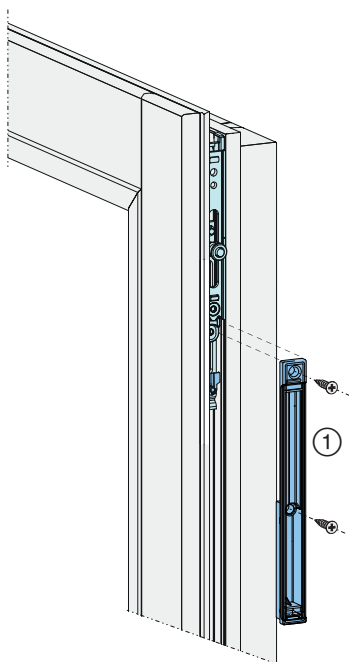





- ④ Reinsert housing ① into the fitting groove and fasten it using suitable screws (e.g. 4 x 28). Tighten the screws by hand only—do not overtighten.

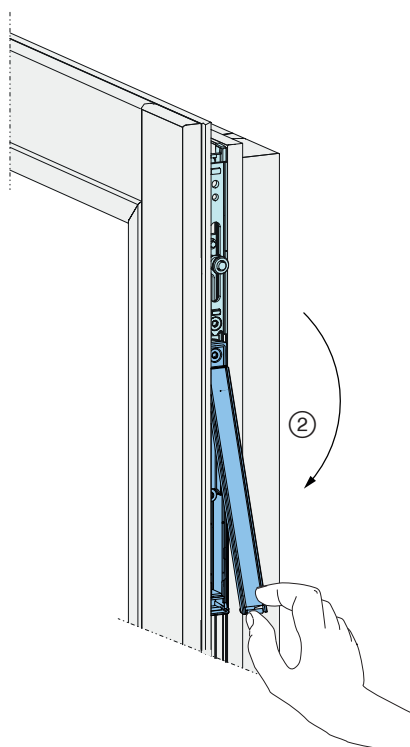

- ⑤ Close housing ① with sensor ② and check the proper mechanical function of the window. This completes the installation. All further steps are to be carried out by the end user.

## (Initial) Start-up

### Insert the battery

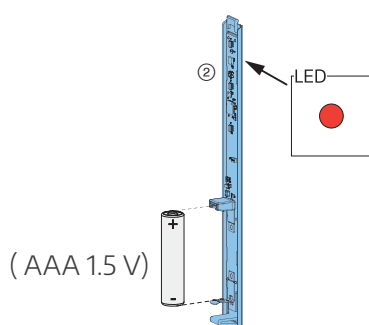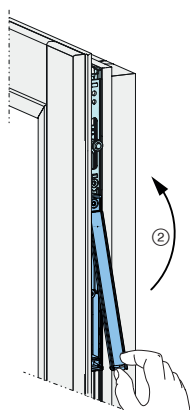

① Open the housing.

② **For battery replacement:** Insert a suitable AAA battery (1.5 V, not included) and close the housing.

**For (Initial) Start-up:** Insert the battery, leave the housing open and proceed to the next step.

After the battery is inserted, the LED will briefly light up.

③ The device automatically enters pairing mode, indicated by the blinking status LED.


## NOTE

The sensor only enters pairing mode automatically during initial start-up or after a soft or hard reset. Re-pairing is not required after a battery replacement.


④ Pair the sensor with your smart home ecosystem. Use the guide “Integration into the smart home System” on page 51 or follow the instructions provided by your smart home provider. Once pairing is successful, the status LED will turn off. In the app, the sensor status will be shown as “Open.” Continue with the “Calibration” section.




## Calibration

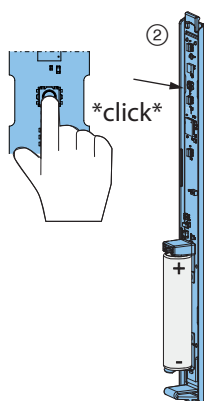

- 1 Briefly press the user button. This process can be repeated at any time if required.

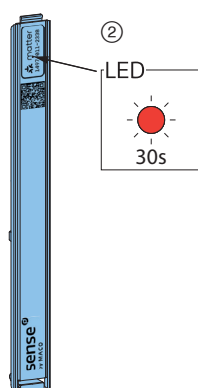

- 2 The sensor will now enter calibration mode for 30 seconds. During this time, the status LED will flash.

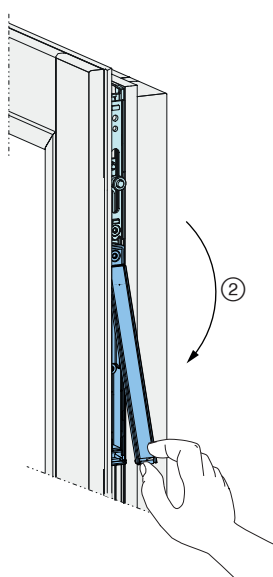

- 3 Place sensor ② back onto housing ①. Properly close and lock the sash within 30 seconds of pressing the user button. Wait until the sensor status is shown as "Closed" in the smart home app.
- 4 Check whether all states of the component are correctly detected by the sensor. To do this, open and close the sash and verify the status in your smart home app.




An incorrectly or improperly calibrated device may transmit invalid status information to the smart home system. A failed calibration is indicated by the status LED blinking slowly three times.

## Reset


### Soft Reset

A soft reset restarts the device and then puts it back into pairing mode. This will remove any existing pairing with a smart home ecosystem, but the calibration settings will be retained.


- 1 Open the housing.

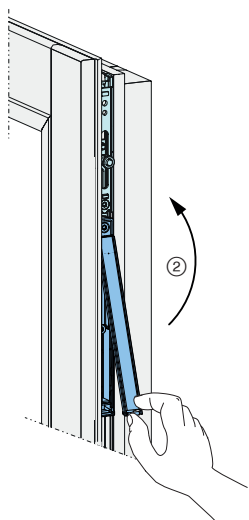

- 2 Press and hold the user button for at least 5 seconds until the LED briefly turns off. Release the user button to perform the soft reset.

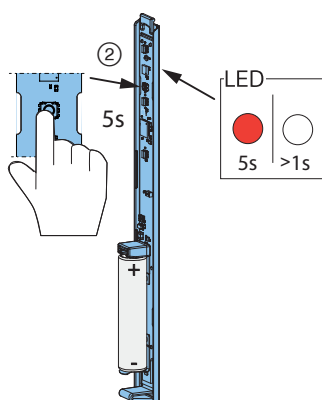


- 3 Once the soft reset is complete, the product automatically enters pairing mode, indicated by the blinking status LED. Continue with step 4 in the "Initial Start-up" section. Re-calibration (see "Calibration" section) is possible but not strictly required.

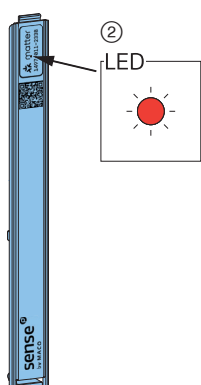




## Hard Reset


A hard reset fully restores the device to factory settings. This will erase any existing pairing with a smart home ecosystem as well as any previously performed calibration.

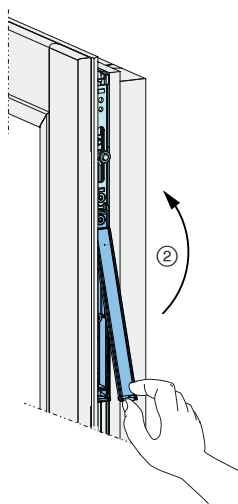

- 1 Open the housing.

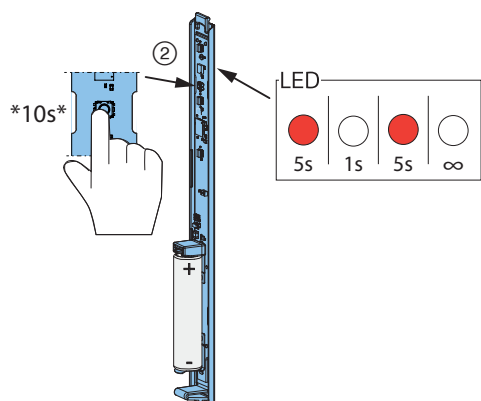

- 2 Press and hold the user button for at least 10 seconds. After about 5 seconds, the status LED will briefly turn off and then light up again. Keep holding the button until the LED turns off completely. Release the user button to perform the hard reset.

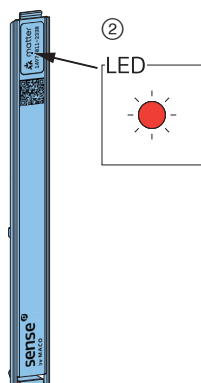

- 3 Once the hard reset is complete, the product automatically enters pairing mode, indicated by the blinking status LED. Continue with step 4 in the "(Initial) Start-up" section.


## Datasheet

Product Name	Sense by MACO   Window Pro T&T
Order Number	481961
Housing Material	PC/ABS
Colour	black
Dimensions	161.1 x 15.9 x 13.8 mm
Operating Temperature	-10 ... +55°C
Humidity	≤95%, non-condensing
Storage Temperature	-25 ... +70°C
User Groups	non-commercial users
Application Environment	fully enclosed indoor spaces
Frequency Bands	IEEE 802.15.4-2006 2400–2483.5 MHz
Transmission Power	Bluetooth: +8dBm Thread: +8dBm
Power Supply	1 x Battery AAA 1.5 V
Battery Life	approx. 2 years
Operating Voltage	1.5 V
User Interface	1x user button 1x status LED (red)
Communication Interface	Matter Bluetooth Thread
IP Rating	IP51 when installed
Certification	CE



# Sense by MACO | Casement

## Overview

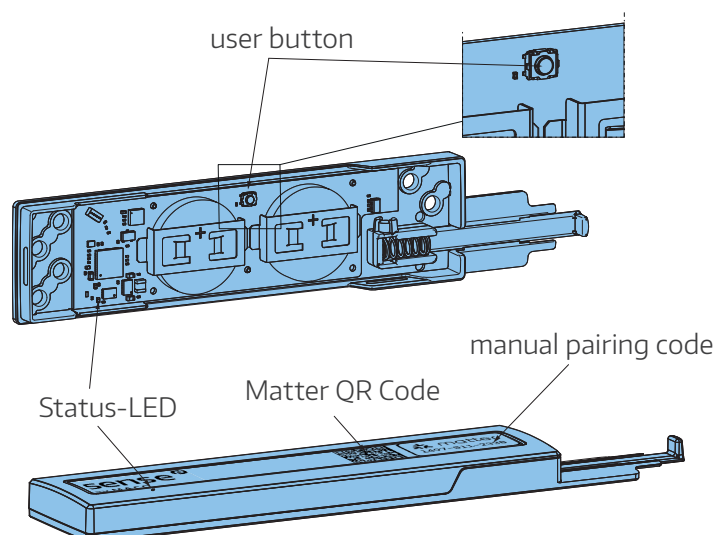


## Content

Overview .....	19
Package Contents .....	20
Mounting .....	21
(Initial) Start-up .....	23
Insert the battery .....	23
Calibration .....	24
Reset .....	25
Soft Reset .....	25
Reset .....	26
Hard Reset .....	26
Datasheet .....	27

## Package Contents

Pos. no.	Name	Qty.
①	Sense by MACO   Casement	1
②	Housing cover	1
③	Spacer 1 mm	2
④	Spacer 2 mm	2
⑤	Spacer 4 mm	2
⑥	Package insert	1

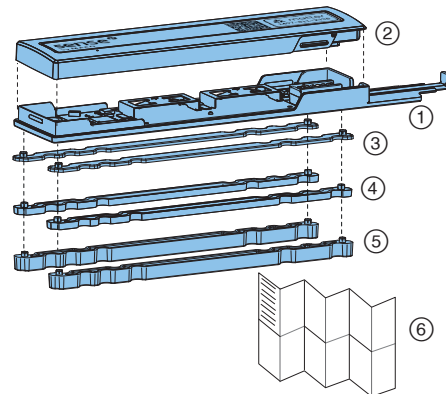

### CAUTION

#### Magnetic Field!

Magnets can endanger and damage electronic and mechanical components.

› Remove such objects from the installation area.



### NOTE

Never operate the slider by hand. Otherwise the sensor will be damaged.


## Required (not included in delivery)

Name	Qty.
Battery CR2032 3 V	2



## Tools

Name
Cordless drill
Drill bit Ø 2
Screwdriver
Pencil

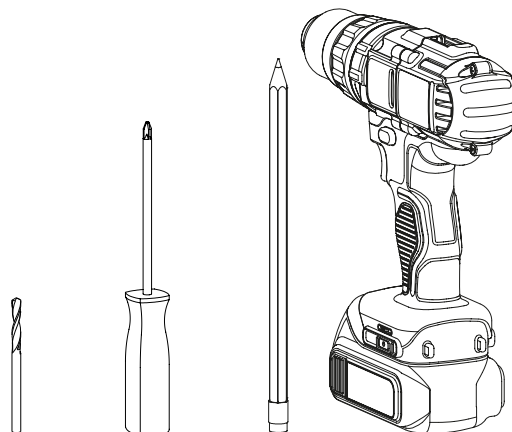

### NOTE


Do not use power tools to fasten the sensor, as excessive tightening torque may damage the housing.






## Mounting


Sense by MACO | Casement is compatible with MACO ESPAGS hardware for outward-opening windows and is mounted on the frame next to a striker plate with mushroom cam locking. For horizontal installation, the sensor can be mounted either to the left or right of the striker plate. For vertical installation, it's best to position the sensor above the striker plate; only use the position below if necessary. Use the included spacers to ensure the sensor is aligned properly with the profile and the slider sits flush in the striker plate.

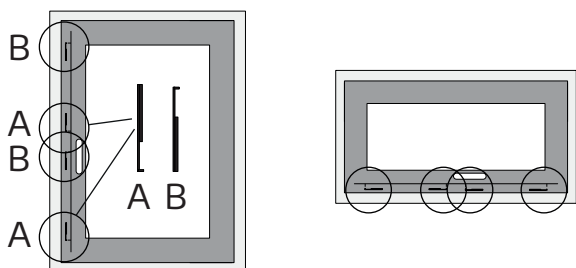


- 1 Refer to the graphic to determine the recommended installation position for the Sense by MACO | Casement. Position A is the preferred choice for vertical installation.

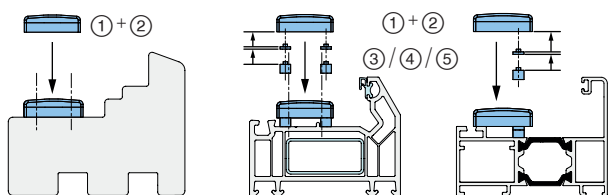

- 2 Select the appropriate spacers (3, 4, 5) according to the installed profile. These can be stacked if necessary.

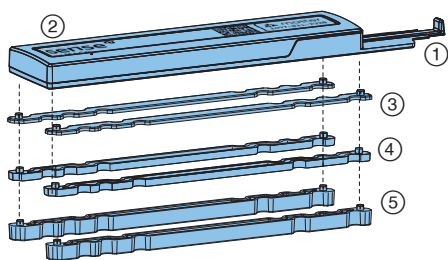


- 3 Clip the required spacers (3, 4, 5) onto sensor 1. Arrange the spacers to create a stable base for the sensor.

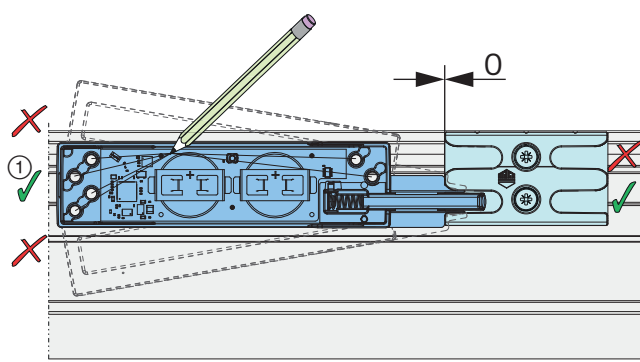


- 4 Position housing at striker plate as shown and mark two diagonal holes.


## Mounting (Continued)

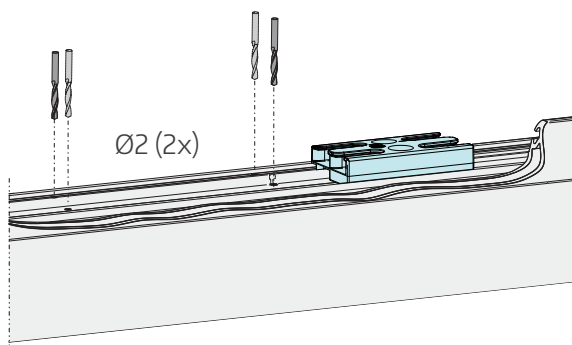

- 5 Pre-drill two diagonal holes using a Ø 2 drill bit.

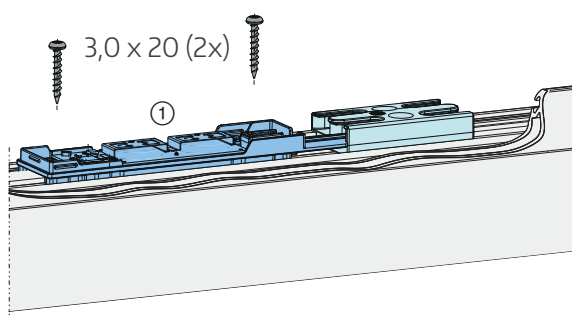


- 6 Fasten sensor ① diagonally with 2 screws (3.0 x 20). Tighten the screws by hand (<1 Nm). Ensure the slider moves parallel into the striker plate.

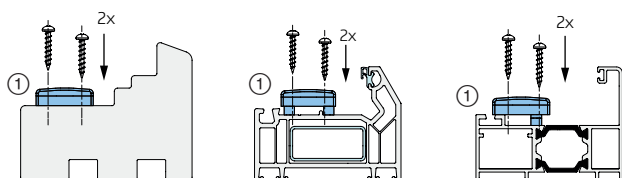

### NOTE

Never operate the slider by hand. Otherwise the sensor will be damaged.





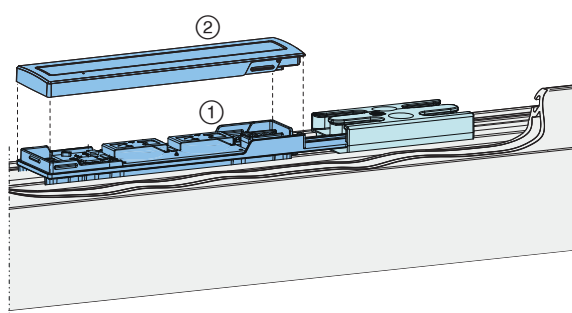


- 7 Close sensor ① with cover ② and check the correct mechanical function of the window. Mounting is now complete. All further steps will be carried out by the end customer.



## (Initial) Start-up

### Insert the battery

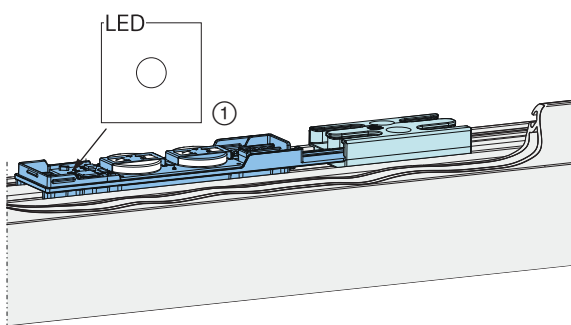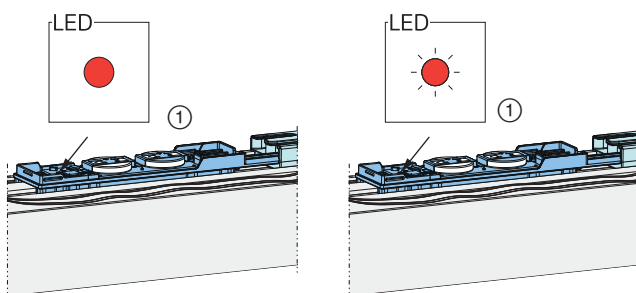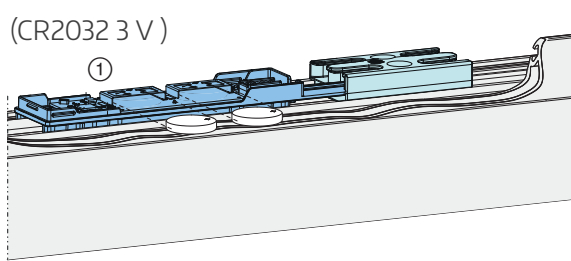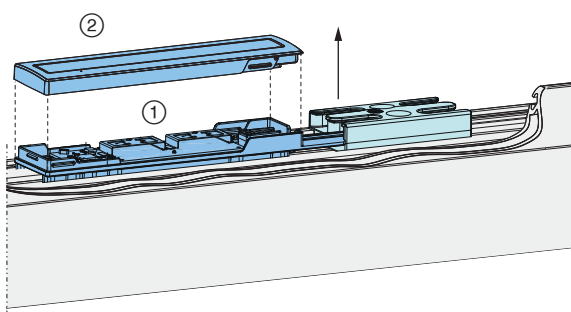

1 Open the housing 2.

2 **For battery replacement:** Insert suitable batteries (CR2032, 3 V, not included) and close the housing.

**For (Initial) Start-up:** Insert the batteries, leave the housing open and proceed to the next step.

After the batteries are inserted, the LED will briefly light up.


3 The device will automatically enter pairing mode, indicated by a flashing status LED.

### NOTE


The sensor only enters pairing mode automatically during initial start-up or after a soft or hard reset. Re-pairing is not required after a battery replacement.

4 Pair the sensor with your smart home ecosystem. Refer to the "Integration into the smart home System" guide on page 51 or the instructions provided by your smart home ecosystem supplier. Once pairing is successful, the status LED will turn off. The sensor status will be displayed as "Open" in the app. Proceed with the "Calibration" chapter.


## Calibration

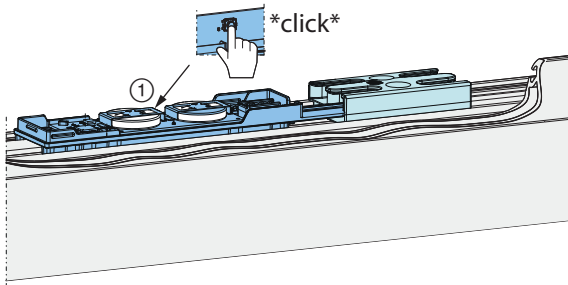

- 1 Briefly press the user button. This process can be repeated at any time if required.

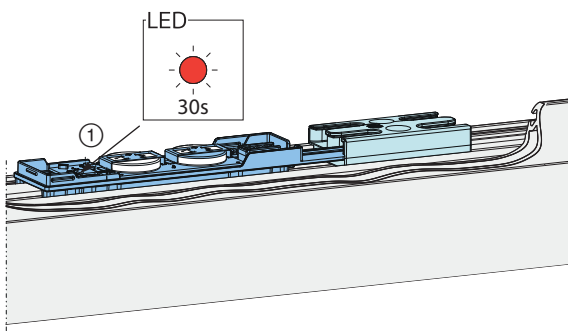

- 2 The sensor ② will now enter calibration mode for 30 seconds. During this time, the status LED will flash.

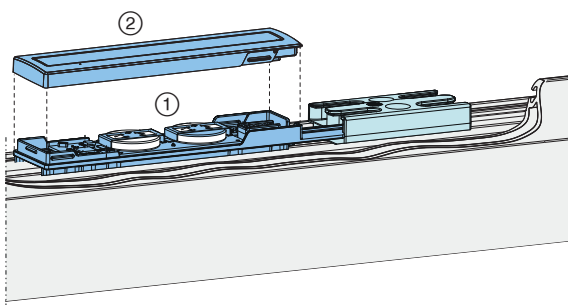

- 3 Close the sensor. Close and lock the sash properly within 30 seconds of pressing the user button. Wait until the status of the sensor is displayed as 'Closed' in the smart home app.

- 4 Check whether all states of the component are correctly detected by the sensor. To do this, open and close the sash and verify the status in your smart home app.



### NOTE


An incorrectly or improperly calibrated device may transmit invalid status information to the smart home system. A failed calibration is indicated by the status LED blinking slowly three times.




## Reset

### Soft Reset


The soft reset restarts the product, deletes the connection with the smart home system and puts it into pairing mode. The calibration data is retained.

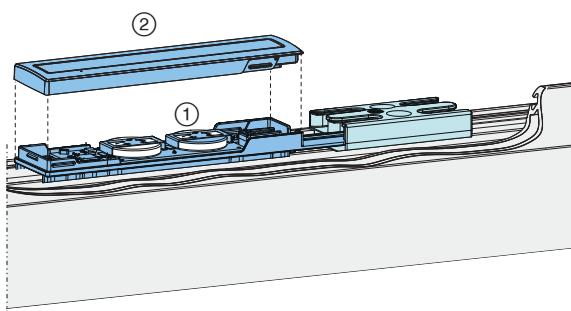

- 1 Open the housing ②.

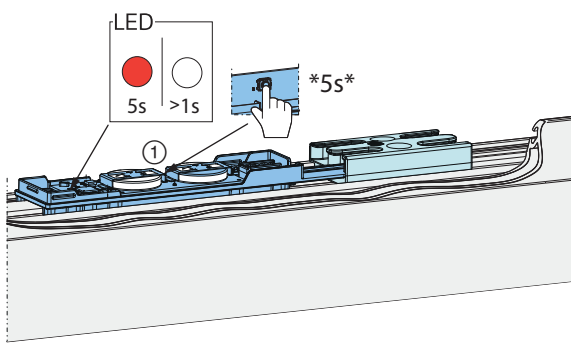

- 2 Press and hold the user button for at least 5 seconds until the LED shortly turns off. Release the user button to start the soft reset.

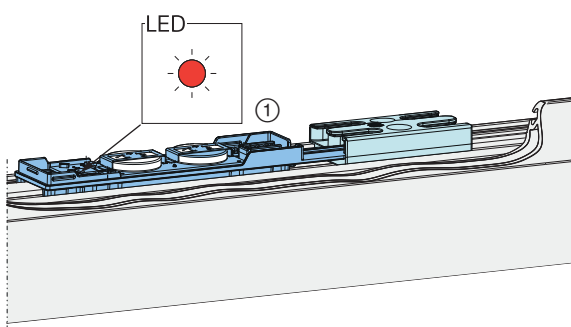


- 3 Once the soft reset is completed, the product will automatically enter pairing mode. This is indicated by a flashing status LED. Continue with step 4 in chapter „Start-up“. Recalibration (see chapter „Calibration“) is possible, but not necessary.


## Reset

### Hard Reset


The hard reset resets the product to factory settings, deletes the calibration data as well as the connection with the smart home system and puts it into pairing mode.

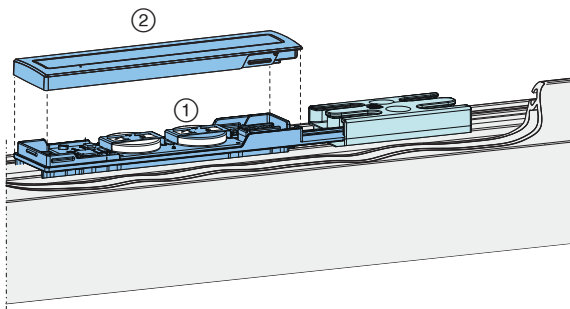

- 1 Open the housing ②.

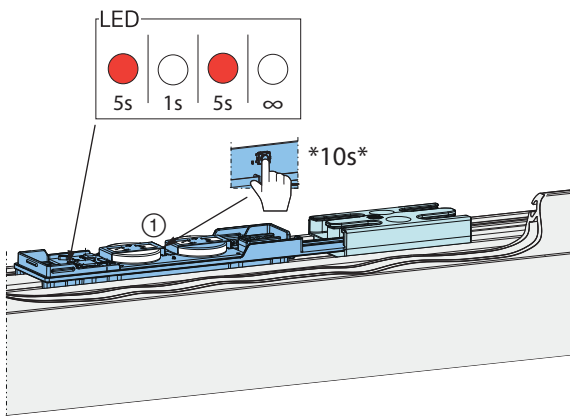

- 2 Press and hold the user button for at least 10 seconds. After 5 seconds, the status LED will briefly switch off and then lights up again. Continue to push the user button until the LED turns off permanently. Release the user button to start the hard reset.

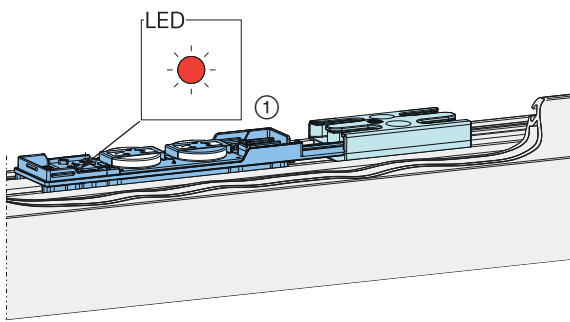

- 3 Once the hard reset is completed, the product will automatically enter pairing mode. This is indicated by a flashing status LED. Continue with step 4 in chapter „Start-up“.




## Datasheet

Product Name	Sense by MACO   Casement
Order Number	481963
Housing Material	PC/ABS
Colour	black
Dimensions	131.3 x 26.1 x 8.0 mm
Operating Temperature	-10 ... +55°C
Humidity	≤95%, non-condensing
Storage Temperature	-25 ... +70°C
User Groups	non-commercial users
Application Environment	fully enclosed indoor spaces
Frequency Bands	IEEE 802.15.4-2006 2400–2483.5 MHz
Transmission Power	Bluetooth: +8dBm Thread: +8dBm
Power Supply	2x Battery CR2032 3V
Battery Life	approx. 2 years
Operating Voltage	6 V
User Interface	1x user button 1x status LED (red)
Communication Interface	Matter Bluetooth Thread
IP Rating	IP50 when installed
Certification	CE

# Sense by MACO | Door

## Overview

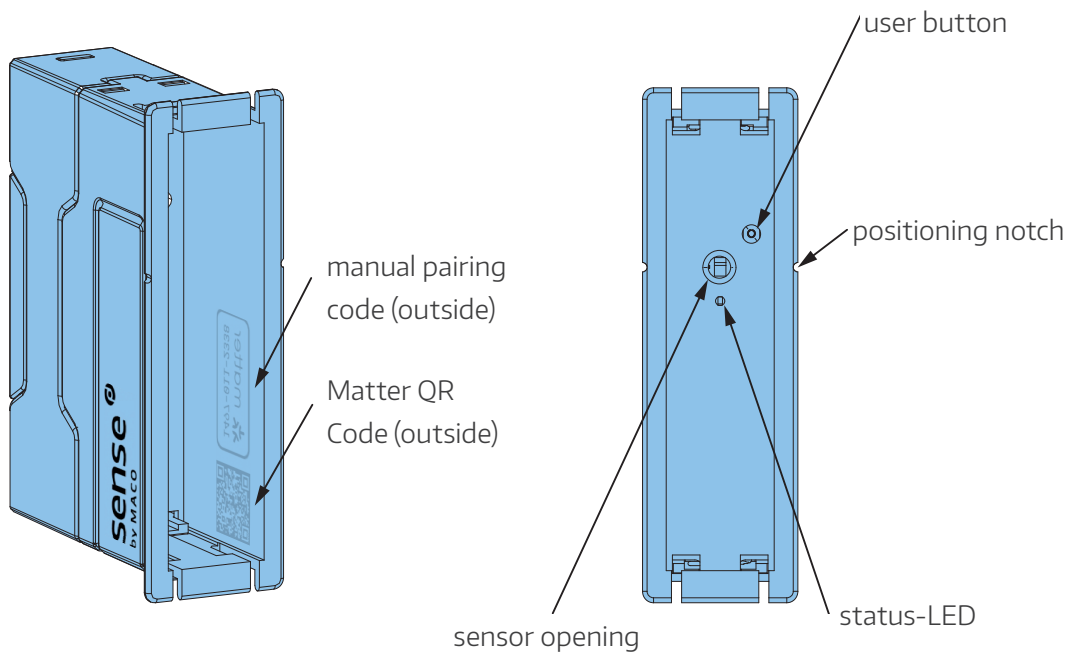

## Content


<b>Overview</b> .....	<b>28</b>
<b>Package Contents</b> .....	<b>29</b>
<b>Mounting</b> .....	<b>30</b>
<b>Installation Option A</b> .....	<b>31</b>
<b>Installation Option B</b> .....	<b>31</b>
<b>(Initial) Start-up</b> .....	<b>33</b>
Insert the battery .....	33
Calibration .....	34
<b>Reset</b> .....	<b>35</b>
Soft Reset .....	35
Hard Reset .....	36
<b>Datasheet</b> .....	<b>37</b>





## Package Contents

Pos. no.	Name	Qty.
①	Sense by MACO   Door	1
②	Battery cover	1
③	Package insert	1

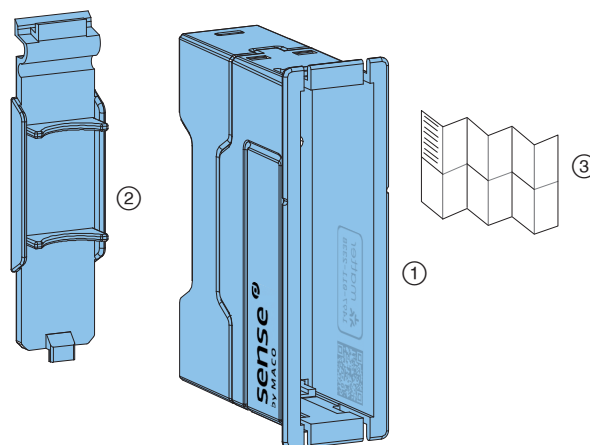


## Required (not included in delivery)

Name	Qty.
Battery AAA 1.5 V	1



## Mounting

The existing routing cover in the frame will be replaced with the Sense by MACO | Door product. De-mounting and mounting can be done without tools.

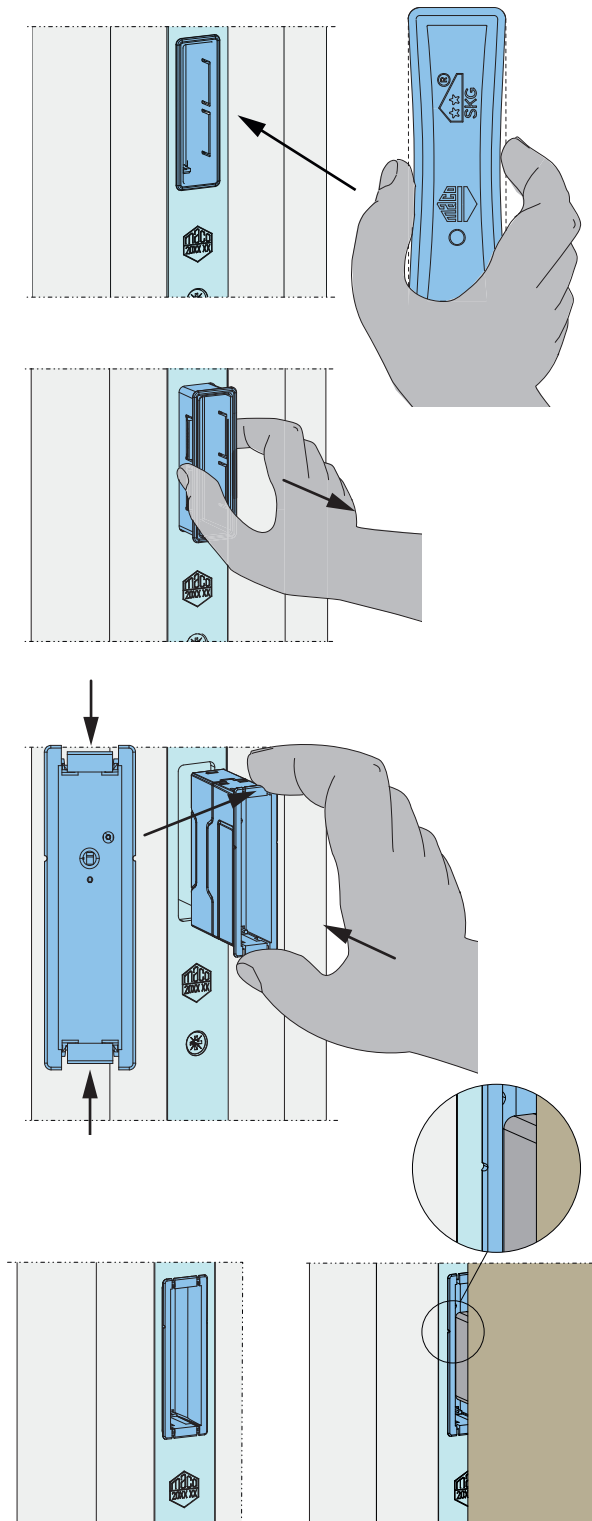

- 1 Press the existing routing cover together as shown in the graphic to release the retaining tabs from their recess. Now, pull the routing cover straight out.

- 2 Take product ① and press the tabs at the top and bottom together as shown in the graphic. Slide the sensor into the recess for the routing cover. Note the two different installation options for the sensor that vary depending on the door lock. Ensure that the routing depth is sufficient and that the positioning notches cover the deadbolt of the door lock.




### NOTE

The Matter pairing code is printed directly on the side of the Sense by MACO | Door. If this information is lost or damaged, the sensor may become unusable. Secure this information and always mount and demount the Sense by MACO | Door with care.




## Installation Option A

Positioning notches in the upper third

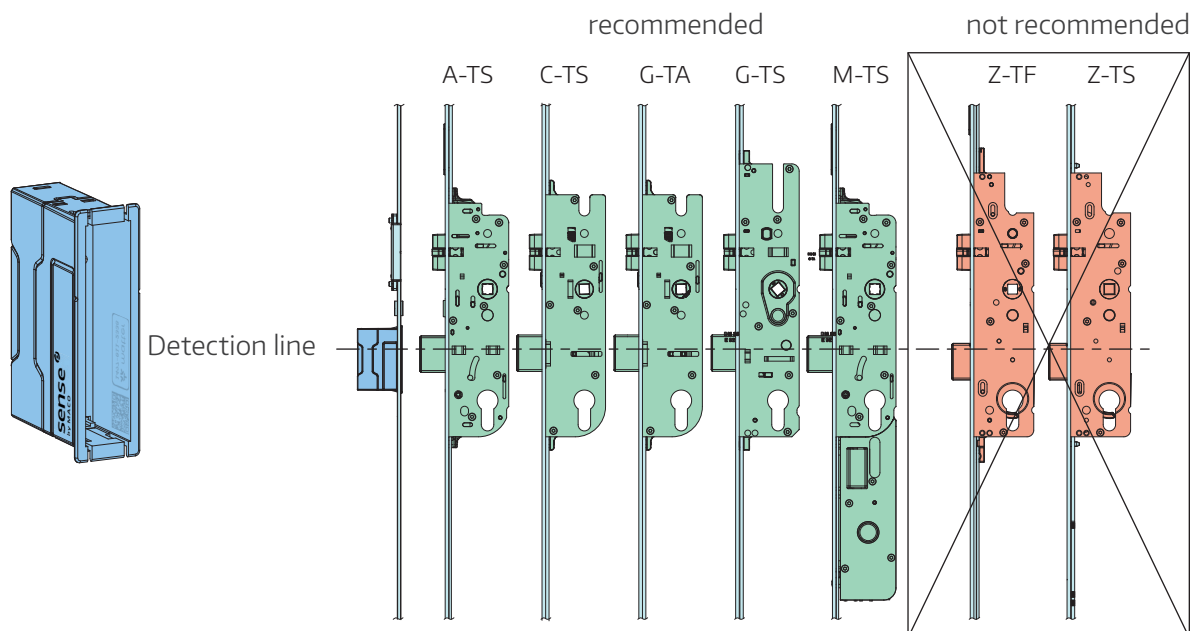

## Installation Option B



Positioning notches in the lower third

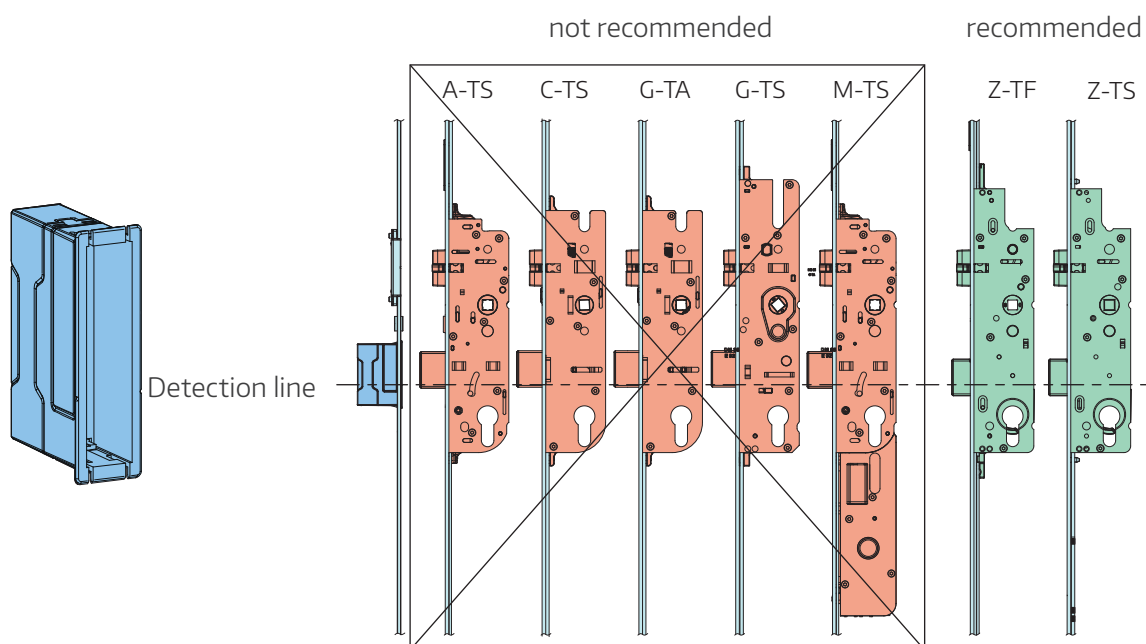





## NOTE

Depending on the door lock variant or due to on-site tolerances, the position of the deadbolt may be outside the sensor range. In this case, Sense by MACO | Door must be rotated by 180° so that the deadbolt is detected.

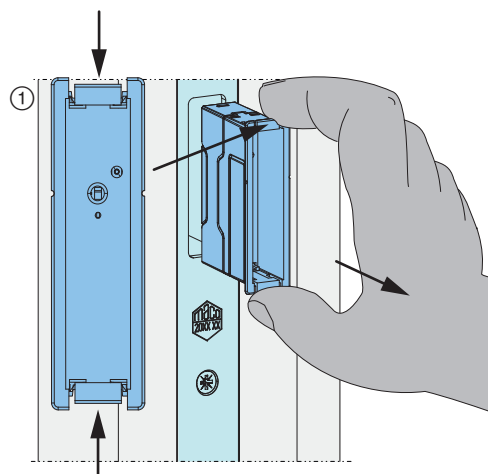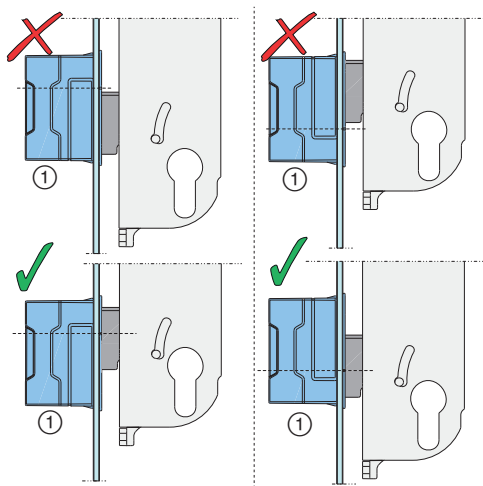


- 1 Carefully press the tabs at the top and bottom of the housing and pull sensor ① out of the recess.

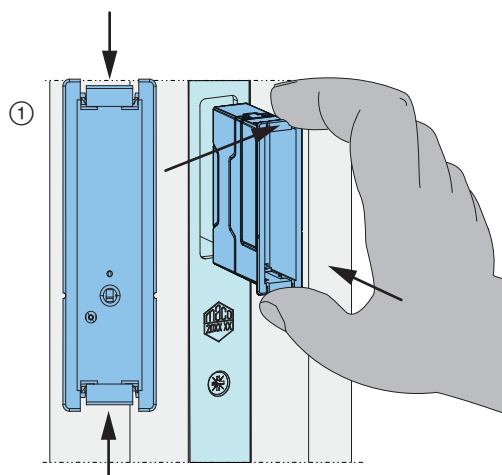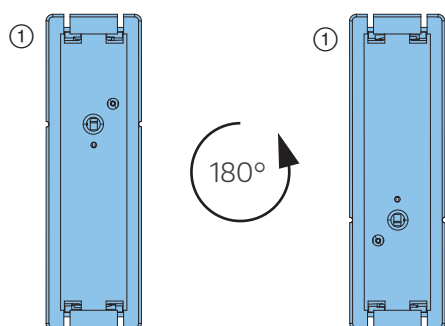

- 2 Rotate sensor ① by 180° and squeeze the tabs at the top and bottom as shown in the graphic. Slide it back into the recess. Ensure that the positioning notches are level with the deadbolt of the door lock. Check the mechanical function of the door. Mounting is now complete. All further steps will be carried out by the end customer.



## (Initial) Start-up Insert the battery

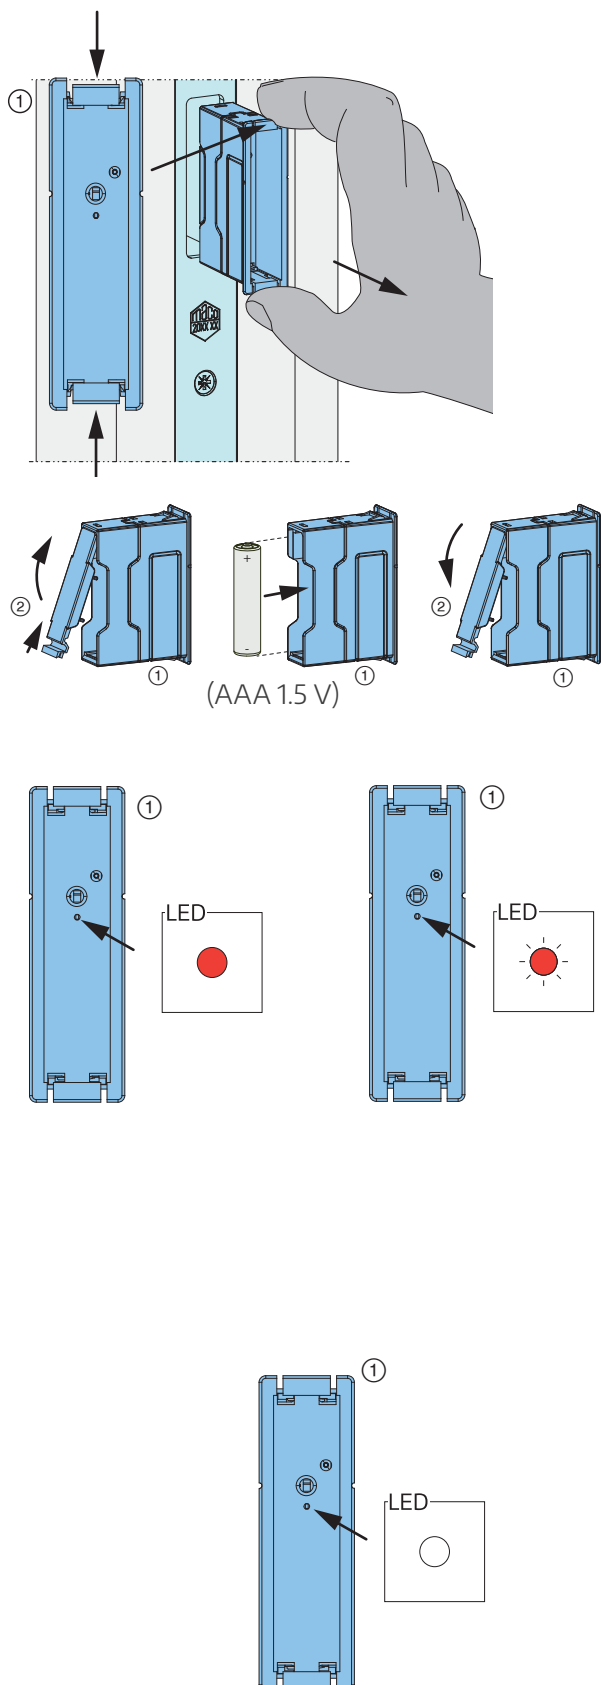

- 1 Carefully release the sensor by pressing in the tabs at the top and bottom of the housing, and then pull it out. Note the current installation position and lateral positioning notches.
- 2 Open the battery compartment ②. Insert a suitable battery (AAA 1.5 V, not included). The LED lights up briefly. Close the battery compartment.
- 3 The device will automatically enter pairing mode, indicated by the flashing of the status LED. Close the battery compartment.






### NOTE

The sensor only enters pairing mode automatically during initial start-up or after a soft or hard reset. Re-pairing is not required after a battery replacement.

- 4 Re-insert the sensor into the component. Pair the sensor with your smart home ecosystem. Refer to the "Integration into the smart home System" guide on page 51 or the instructions provided by your smart home ecosystem supplier. Once pairing is successful, the status LED will turn off. The sensor status will be displayed as "Open" in the app. Proceed with the "Calibration" chapter.

## Calibration

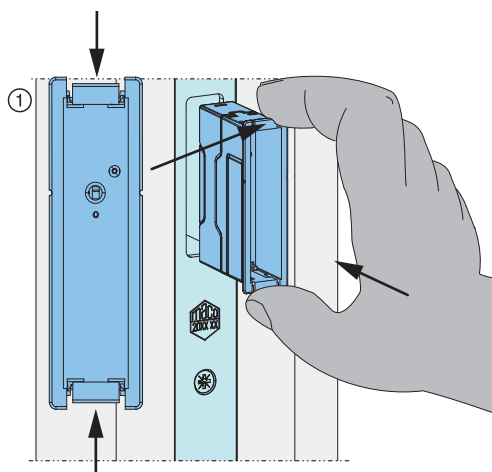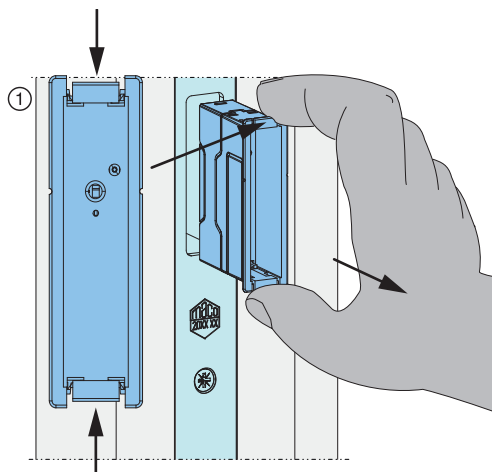

- 1 To make pressing the user button easier, carefully release the sensor by pressing in the tabs at the top and bottom of the housing and pull it out if necessary.



### NOTE

#### Risk of Material Damage

The sensor has several openings. Ensure that you insert the object into the correct opening. Otherwise, the sensor will be damaged.

- 2 Briefly press the user button. Use a small, pointed object for this purpose (e.g., a bent paperclip or a ballpoint pen). This process can be repeated at any time if needed.
- 3 The sensor will now enter calibration mode for 30 seconds. During this time, the status LED will flash.
- 4 Reinsert the sensor into the striker. To insert the sensor, carefully press in the tabs at the top and bottom of the housing. Ensure that the installation position and lateral positioning notches are correct. These must be at the height of the deadbolt of the door lock. Due to on-site tolerances, the position of the deadbolt may be outside the sensor area when installed as described. In this case, Sense by MACO | Door must be rotated by 180°. Lock the door properly within 30 seconds of pressing the user button. Wait until the status of the sensor is displayed as „Closed“ in the smart home app.




### NOTE

An incorrectly or improperly calibrated device may transmit invalid status information to the smart home system. A failed calibration is indicated by the status LED blinking slowly three times.




## Reset Soft Reset

The soft reset restarts the product, deletes the connection with the smart home system and puts it into pairing mode. The calibration data is retained.

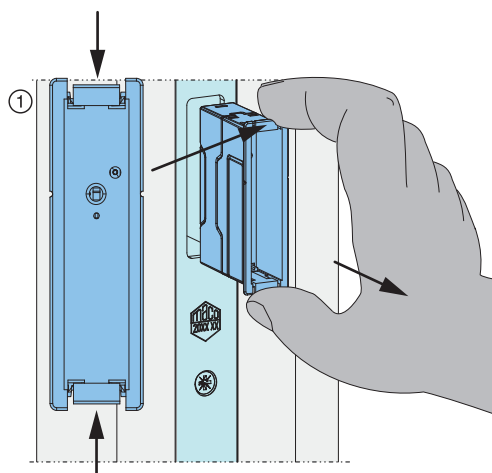


- ① To make pressing the user button easier, carefully release the sensor by pressing in the tabs at the top and bottom of the housing and pull it out if necessary.



when the LED shortly turns off. Release the user button to start the soft reset.


- ③ Once the soft reset is completed, the product will




automatically enter pairing mode. This is indicated by a flashing status LED. Continue with step 5 in chapter „Start-up“. Recalibration (see chapter „Calibration“) is possible, but not necessary.

## Hard Reset


The hard reset resets the product to factory settings, deletes the calibration data as well as the connection with the smart home system and puts it into pairing mode.

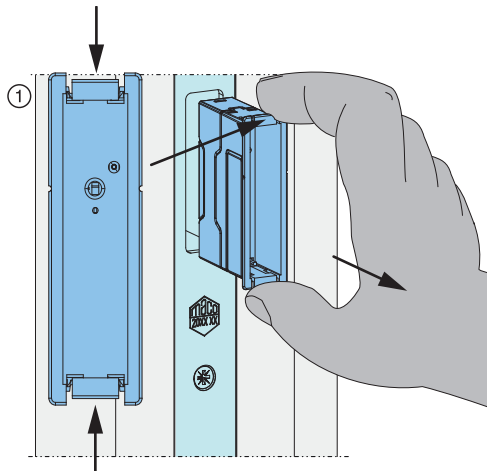

- 1 To make pressing the user button easier, carefully release the sensor by pressing in the tabs at the top and bottom of the housing and pull it out if necessary.



- 2 Press and hold the user button for at least 10 seconds. After 5 seconds, the status LED will turn off and then lights up again. Continue to push the user button until the LED turns off permanently. Release the user button to start the hard reset.



- 3 Once the hard reset is completed, the product will automatically enter pairing mode. This is indicated by a flashing status LED. Continue with step 5 in chapter „(Initial) Start-up“.






## Datasheet

Product Name	Sense by MACO   Door
Order Number	481964
Housing Material	PC/ABS
Colour	black
Dimensions	56.0 x 17.0 x 37.1 mm
Operating Temperature	-10 ... +55°C
Humidity	≤95%, non-condensing
Storage Temperature	-25 ... +70°C
User Groups	non-commercial users
Application Environment	fully enclosed indoor spaces
Frequency Bands	IEEE 802.15.4-2006 2400–2483.5 MHz
Transmission Power	Bluetooth: +8dBm Thread: +8dBm
Power Supply	1 x Battery AAA 1.5 V
Battery Life	approx. 2 years
Operating Voltage	1.5 V
User Interface	1x user button 1x status LED (red)
Communication Interface	Matter Bluetooth Thread
IP Rating	IP51 when installed
Certification	CE

# Sense by MACO | Universal

## Overview

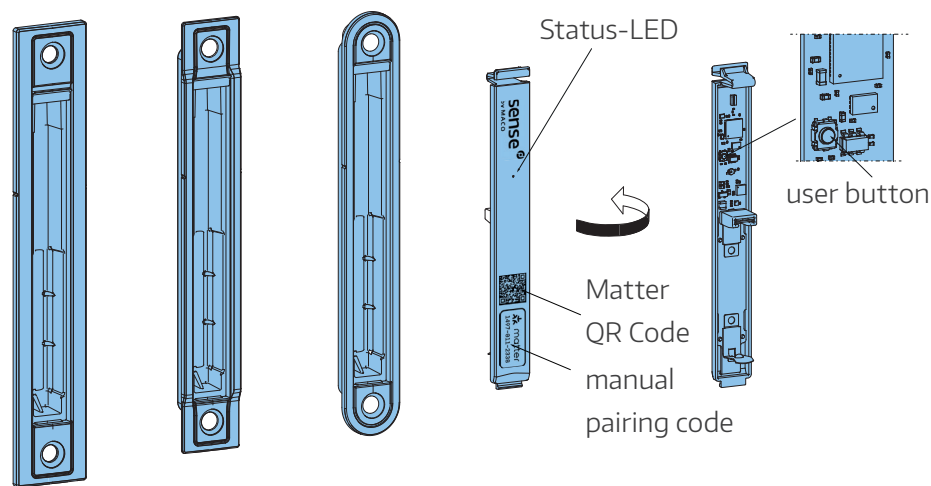


## Content

<b>Overview</b>	<b>38</b>
<b>Package Contents</b>	<b>39</b>
<b>Application as Opening or Lock monitoring</b>	<b>40</b>
Lift-and-slide lock monitoring with magnet holder	40
Window lock monitoring with magnetic cam	41
Door opening monitoring with magnet	42
Window opening monitoring with magnet	43
<b>Mounting</b>	<b>44</b>
Router contour	44
Mounting	45
<b>(Initial) Start-up</b>	<b>46</b>
Insert the battery	46
Calibration	47
<b>Reset</b>	<b>48</b>
Soft Reset	48
Hard Reset	49
<b>Datasheet</b>	<b>50</b>



## Package Contents

Pos. no.	Name	Qty.
①	Sense by MACO   Universal	1
②	Round cover plate	1
③	Square cover plate for eurogroove	1
④	Square cover plate 24 mm	1
⑤	Package insert	1

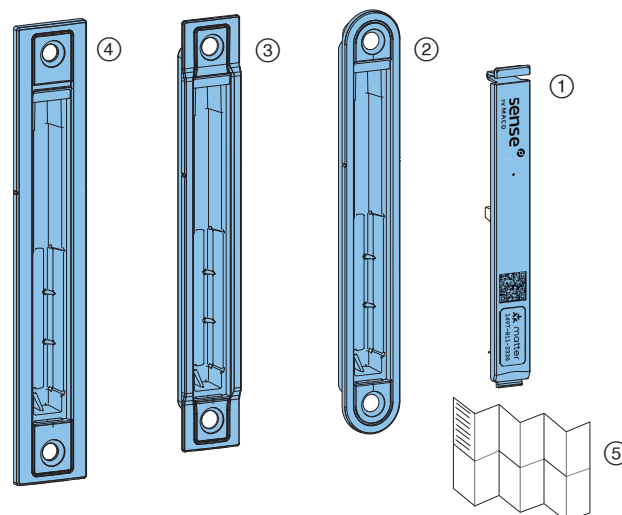


## Required (not included in delivery)

Name	Qty.
Battery AAA 1.5 V	1



## Tools

Name
Cordless drill
Drill bit Ø 4.2
Screwdriver
Pencil

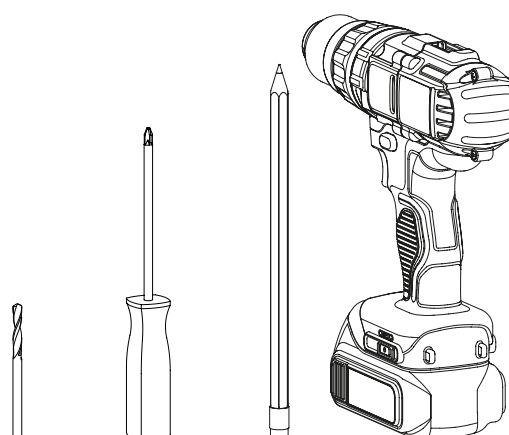



Do not use power tools to fasten the sensor, as excessive tightening torque may damage the housing.

## Application as Opening or Lock monitoring

Sense by MACO | Universal is versatile and can be used in various applications. Depending on the installation situation, the sensor can be used either for lock monitoring in lift-and-slide elements or for opening and lock monitoring in other elements.

### Lift-and-slide lock monitoring with magnet holder

The magnet holder (part no. 304787) enables simple mounting at the drive gear and ensures precise and reliable lock monitoring. The sensor reacts to the magnet in the drive gear and checks whether the element is correctly closed. A suitable mounting position for the magnetic holder is already provided in all drive gears of the MACO hardware family.

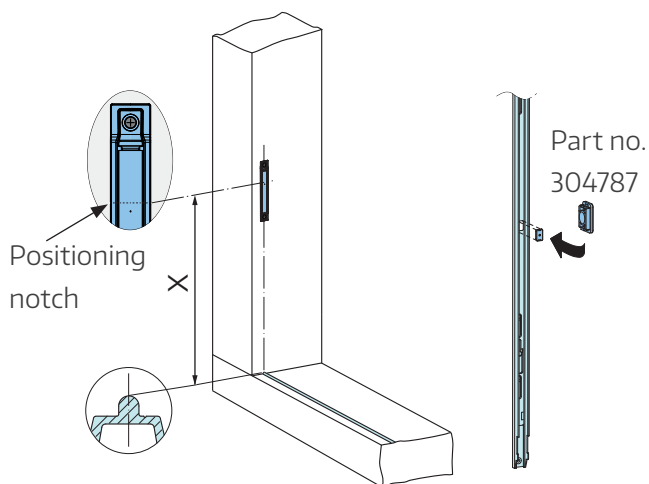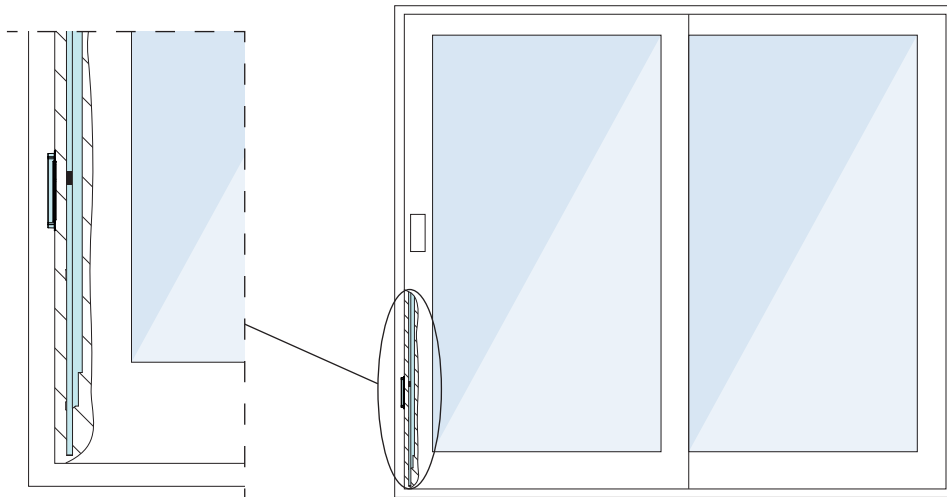




- 1 Clip the magnetic holder (part no. 304787, not included in the delivery) into the corresponding recess of the drive gear and mount the drive gear according to its instructions.
- 2 Select the appropriate cover plate for the profile system, position the sensor opposite the magnet, and rout the required clearance into the frame according to the "Router contour" chapter on page 44. Pre-drill 2x Ø 4.2.
- 3 Mount the cover plate according to the "Mounting" chapter on page 45.
- 4 Check that all the states of the building element are correctly detected by the sensor. Open and close the sash and check the status in your smart home app.


Drive Gear	Dimension X
RAIL HS Sz. 1 and Sz. 2	668 mm
RAIL HS Sz. 3 and above	430 mm
ATRIUM HS Sz. 180	816 mm
ATRIUM HS Sz. 210 and above	464 mm



## Window lock monitoring with magnetic cam

Lock monitoring on a window is possible in conjunction with a magnetic cam. MACO offers various products with magnetic cam. Select the appropriate component and mount it according to its instructions.


Corner element standard with magnetic cam	Faceplate extension MM, extendable with magnetic cam	Magnetic cam
		
Part no. 206190	Part no. 201755	Part no. 228503 & 228504

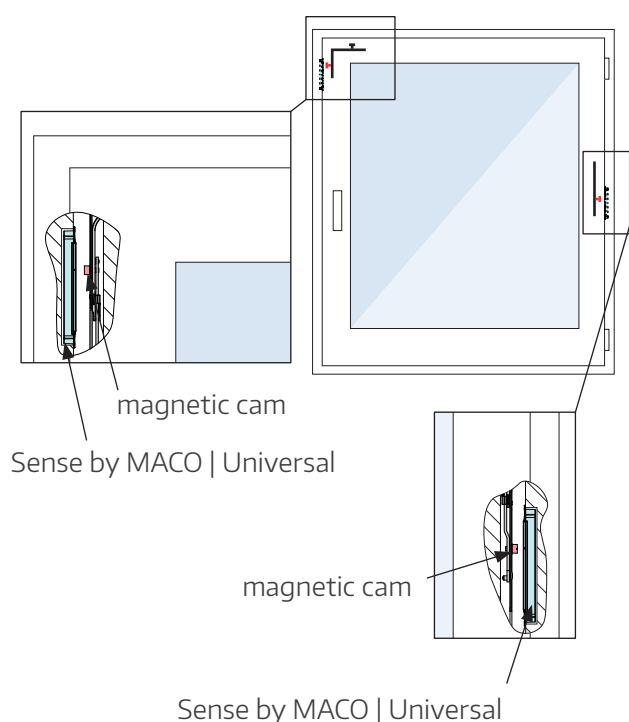


- 1 Mount the fitting or the magnetic cam according to its instructions and install the fitting.
- 2 Determine the position of the magnetic cam when closed.
- 3 Select a suitable cover plate. Rout the contour for the selected cover plate according to the "Router contour" chapter on page 44. The position of the magnetic cam when closed must align with the "Position Magnetic Cam" point in the "Position of the Magnet" illustration.
- 4 Mount the cover plate according to the "Mounting" chapter on page 45.
- 5 Check that all the states of the building element are correctly detected by the sensor. Open and close the sash and check the status in your smart home app.

### Position Magnetic Cam


Square 20 mm

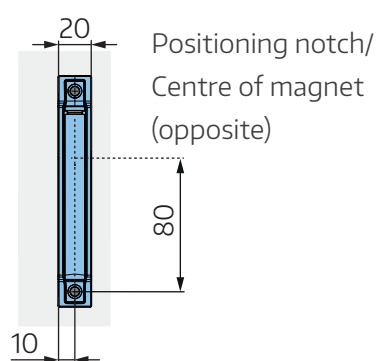

Round 20 mm

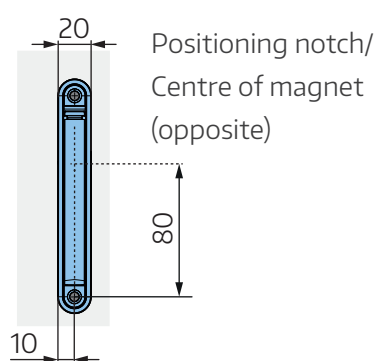


Square 24 mm

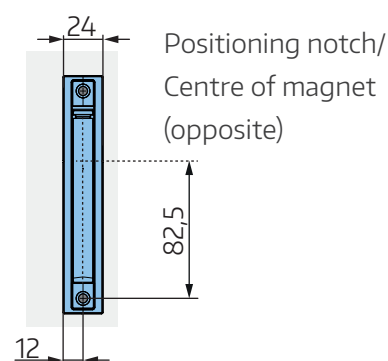

## Door opening monitoring with magnet

In conjunction with the MACO M-TS adhesive magnet (Part no. 373147) or the Maco screw-on contact sensor (Part no. 455428) door opening monitoring can be implemented.

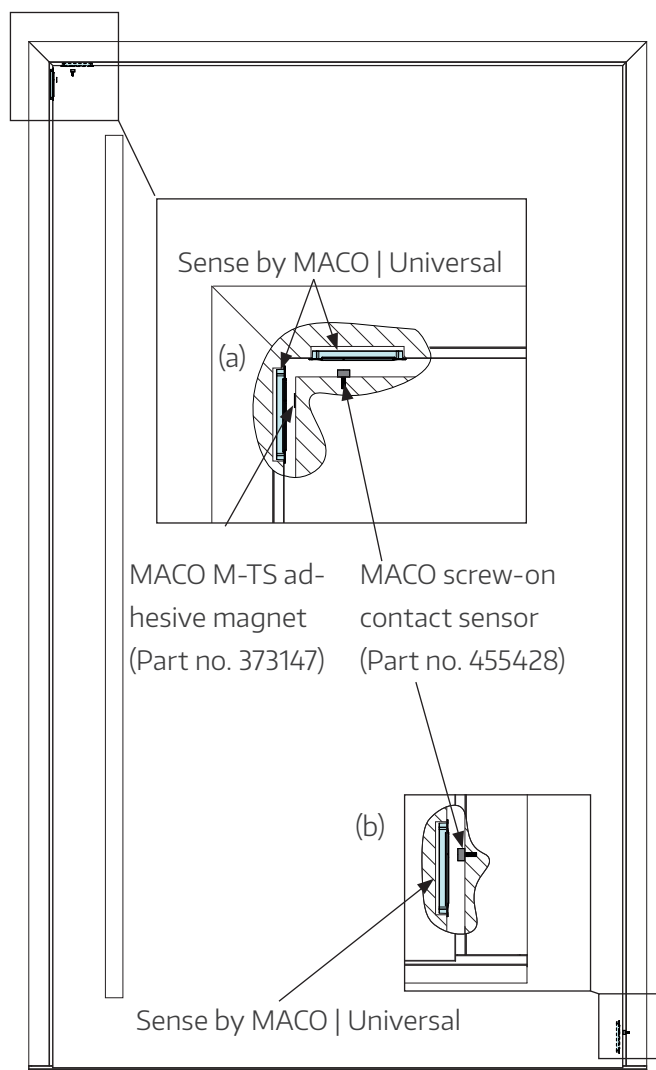


For opening monitoring, Sense by MACO | Universal can be installed in either the door frame (a) or the door leaf (b).


- 1 Choose a suitable sensor position based on the profile geometry.
- 2 Rout the contour for your selected cover plate according to the "Router contour" chapter on page 44.
- 3 Mount the cover plate according to the "Mounting" chapter on page 45.
- 4 Using the "Position of the Magnet" illustration, determine the position for your chosen magnet and mount it on the opposing element.
- 5 Check that all the states of the building element are correctly detected by the sensor. Open and close the sash and check the status in your smart home app.

### Position Magnet


Square 20 mm

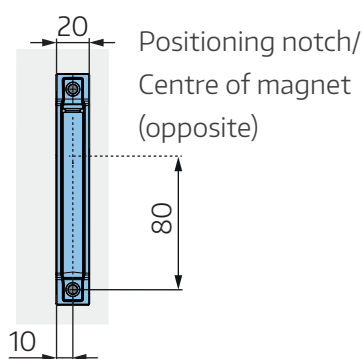

Round 20 mm

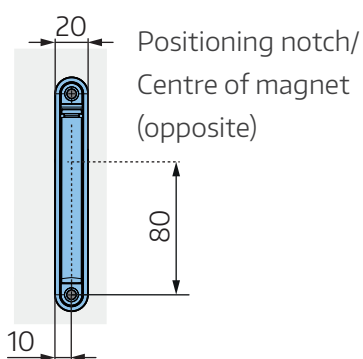


Square 24 mm

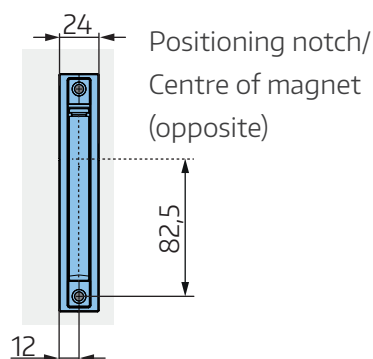



## Window opening monitoring with magnet

In conjunction with the MACO M-TS adhesive magnet (Part no. 373147) or the MACO screw-on contact sensor (Part no. 455428) window opening monitoring can be implemented.

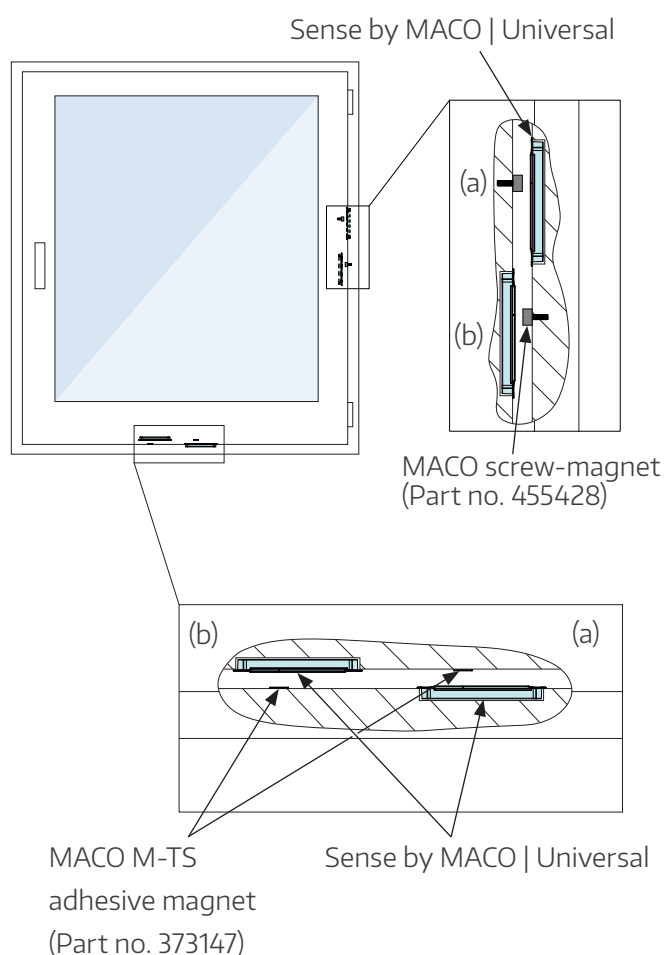


For opening monitoring, the Sense by MACO | Universal can be installed in either the frame (a) or the sash (b), but installation in the sash is recommended if possible.


- 1 Choose a suitable sensor position based on the profile geometry.
- 2 Rout the contour for your selected cover plate according to the "Router contour" chapter on page 44.
- 3 Mount the cover plate according to the "Mounting" chapter on page 45.
- 4 Using the "Position Magnet" illustration, determine the position for your chosen magnet and mount it on the opposing element.
- 5 Check that all the states of the building element are correctly detected by the sensor. Open and close the sash and check the status in your smart home app.

## Position Magnet


Square 20 mm

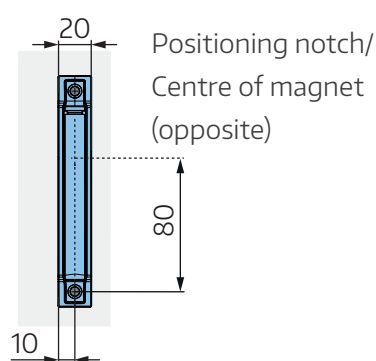

Round 20 mm

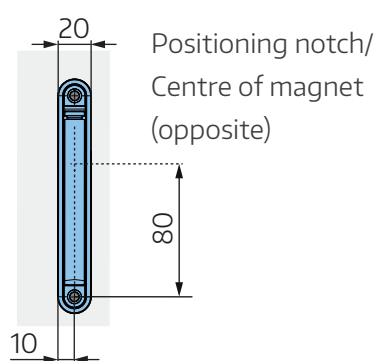


Square 24 mm

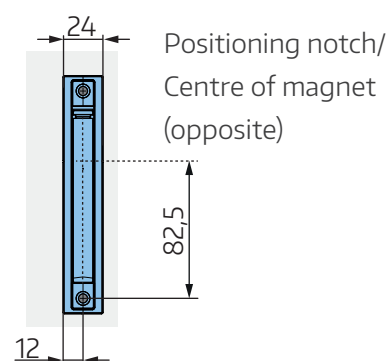


## Mounting Router contour

Round 20 mm

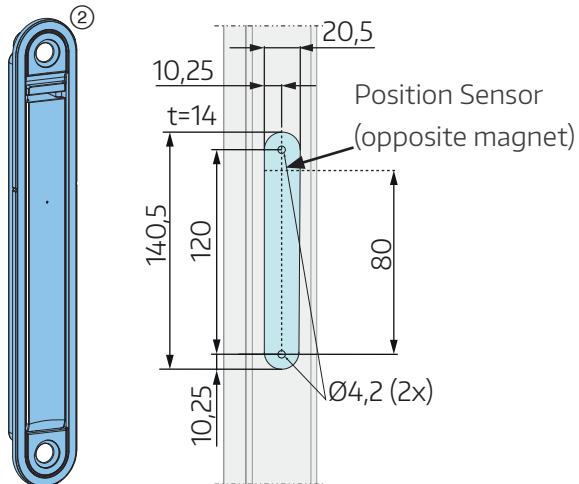


- 1 Select the appropriate cover plate for the profile system, position the sensor opposite the magnet, and rout the necessary clearance in the frame. Pre-drill 2x Ø 4.2.

Square 20 mm

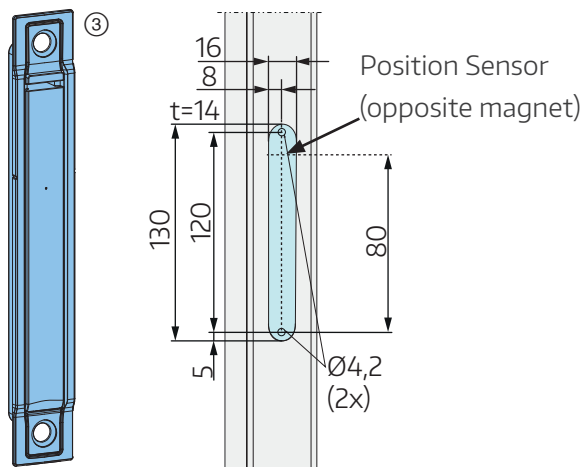


Square 24 mm

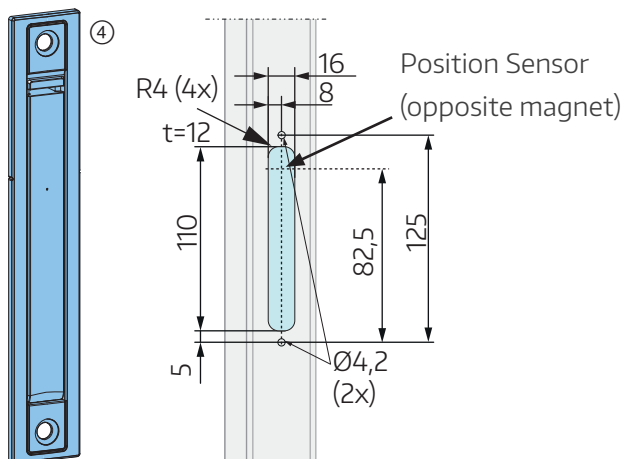






## Mounting

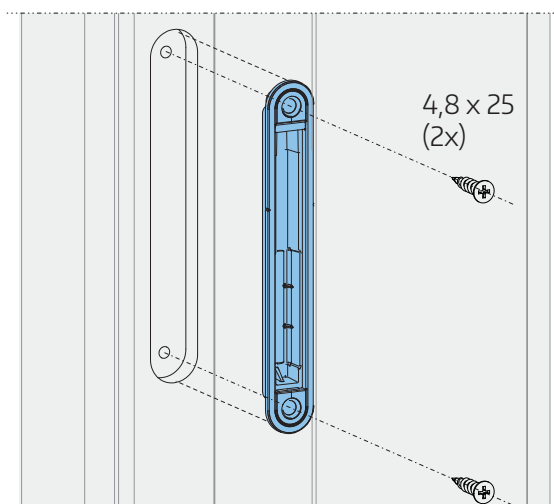


- 1 Screw the housing in place using 4.8 x 25 (2x).

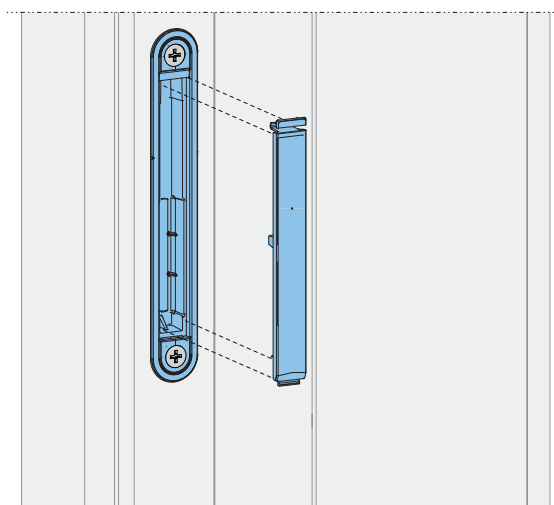


- 2 Close the housing with the cover and check the mechanical function. Mounting is now complete; all further steps are the responsibility of the end customer.

## (Initial) Start-up

### Insert the battery

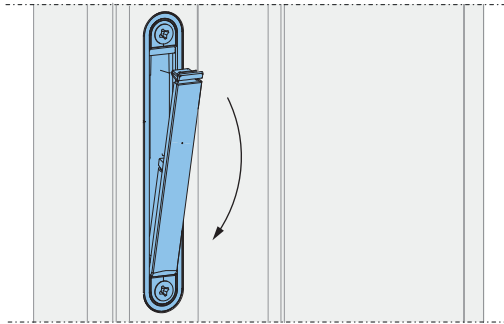

- 1 Open the housing.

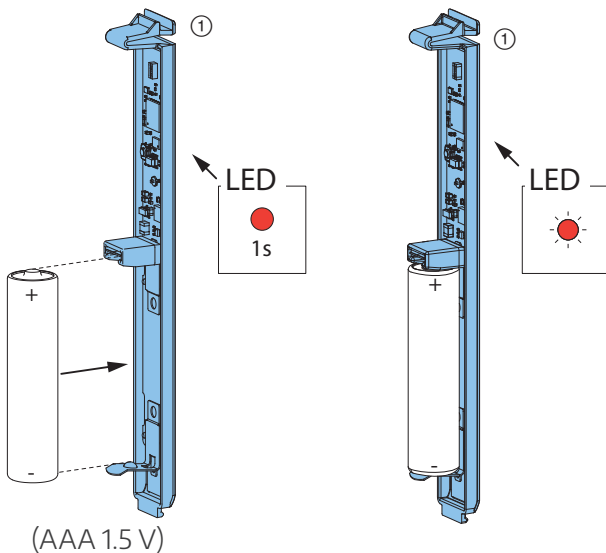

- 2 **For battery replacement:** Insert a suitable AAA battery (1.5 V, not included) and close the housing.


**For (Initial) Start-up:** Insert the battery, leave the housing open and proceed to the next step.

After the battery is inserted, the LED will briefly light up.

- 3 The device automatically enters pairing mode, indicated by the blinking status LED.

### NOTE


The sensor only enters pairing mode automatically during initial start-up or after a soft or hard reset. Re-pairing is not required after a battery replacement.

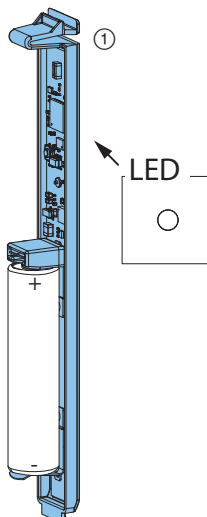

- 4 Pair the sensor with your smart home ecosystem. Use the guide "Integration into the smart home System" on page 51 or follow the instructions provided by your smart home provider. Once pairing is successful, the status LED will turn off. In the app, the sensor status will be shown as "Open." Continue with the "Calibration" section.



## Calibration

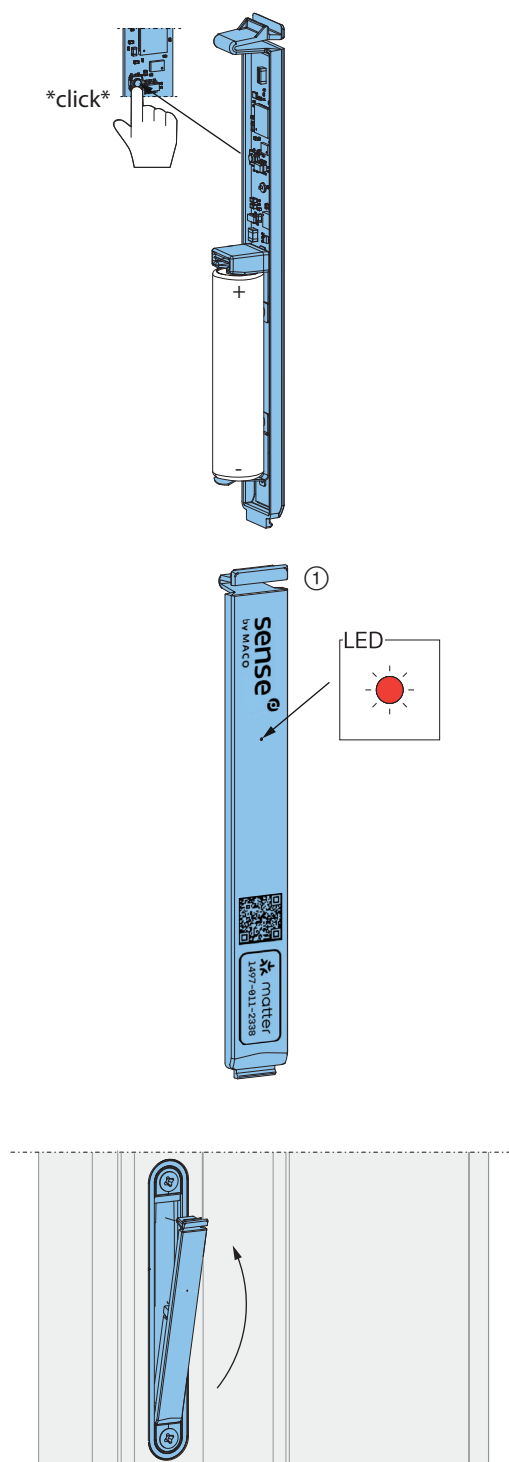

- 1 Briefly press the user button. This process can be repeated at any time if required.
- 2 The sensor ① will now enter calibration mode for 30 seconds. During this time, the status LED will flash.
- 3 Place sensor ① back onto housing ②. Properly close and lock the sash within 30 seconds of pressing the user button. Wait until the sensor status is shown as "Closed" in the smart home app.
- 4 Check whether all states of the component are correctly detected by the sensor. To do this, open and close the sash and verify the status in your smart home app.




### NOTE

An incorrectly or improperly calibrated device may transmit invalid status information to the smart home system. A failed calibration is indicated by the status LED blinking slowly three times.


## Reset

### Soft Reset


A soft reset restarts the device and then puts it back into pairing mode. This will remove any existing pairing with a smart home ecosystem, but the calibration settings will be retained.

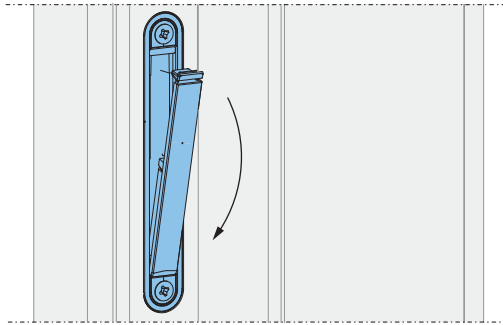

- 1 Open the housing.

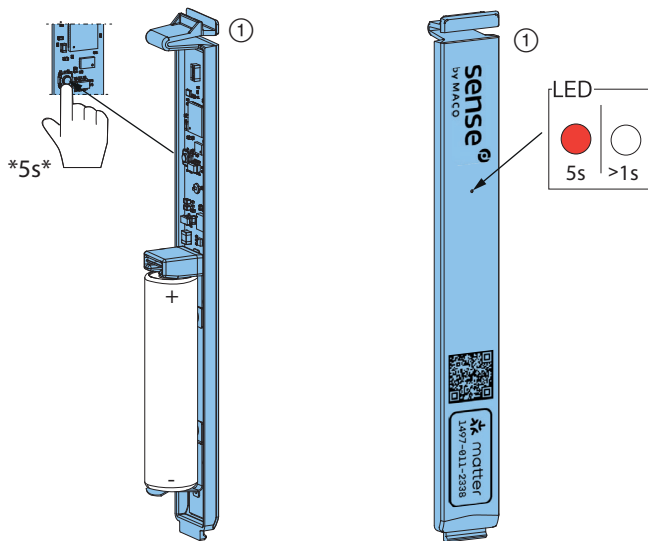

- 2 Press and hold the user button for at least 5 seconds until the LED briefly turns off. Release the user button to perform the soft reset.

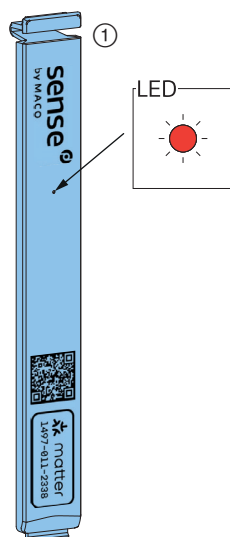


- 3 Once the soft reset is complete, the product automatically enters pairing mode, indicated by the blinking status LED. Continue with step 4 in the "(Initial) Start-up" section. Re-calibration (see "Calibration" section) is possible but not strictly required.




## Hard Reset


A hard reset fully restores the device to factory settings. This will erase any existing pairing with a smart home ecosystem as well as any previously performed calibration.

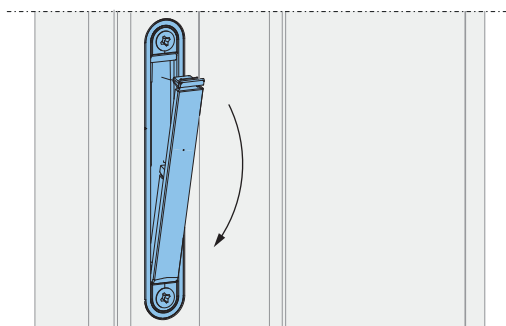

- 1 Open the housing.

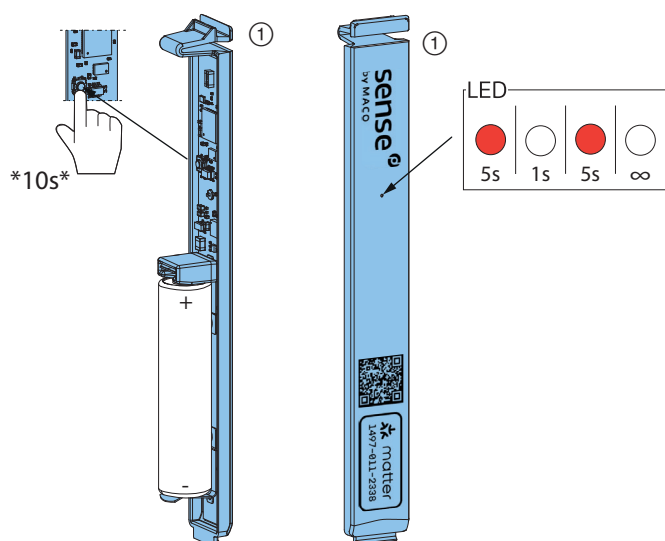

- 2 Press and hold the user button for at least 10 seconds. After about 5 seconds, the status LED will briefly turn off and then light up again. Keep holding the button until the LED turns off completely. Release the user button to perform the hard reset.

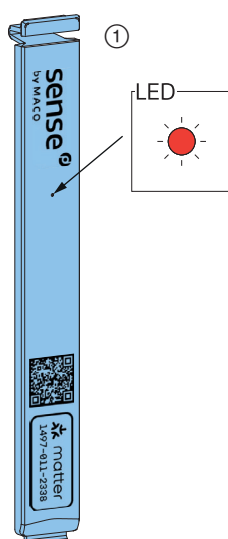

- 3 Once the hard reset is complete, the product automatically enters pairing mode, indicated by the blinking status LED. Continue with step 4 in the "(Initial) Start-up" section.

## Datasheet

Product Name	Sense by MACO   Universal	
Order Number	481965	
Material (housing)	PC/ABS	
Colour	black	
Dimension	round	140.0 x 20 x 13.8 mm
	square	138.5 x 20 x 13.8 mm
	square 24 mm	143.5 x 24 x 13.8 mm
Operating temperature	-10 ... +55°C	
Air humidity	≤95%, non-condensing	
Storage temperature	-25 ... +70°C	
User groups	non-commercial users	
Utilisation environment	fully enclosed indoor spaces	
Frequency bands	IEEE 802.15.4-2006 2400–2483.5 MHz	
Transmission power	Bluetooth: +8dBm Thread: +8dBm	
Power supply	1 x Battery AAA 1.5 V	
Battery life	approx. 2 years	
Operating voltage	1.5 V	
User interface	1x user button 1x status LED (red)	
Communication interface	Matter Bluetooth Thread	
IP-Class	IP51 when installed	
Certificate	CE	



## Integration into the Smart Home System

Integration into the smart home ecosystem is done via the Matter standard. Therefore, no additional application needs to be installed, but you will need a "Thread Border Router" in your network. This is integrated, for example, into the Amazon Echo (4th generation), Apple HomePod (2nd generation), or Google Nest Hub (2nd generation). Separate devices are also available. Please check your smart home devices, as integration is not possible without a "Thread Border Router".

The process of adding smart home devices may vary depending on the smart home system. If you encounter difficulties, please contact the manufacturer of your smart home system for information on adding Matter-compatible devices.

- 1 Open the app of your Matter-compatible smart home system.
- 2 Click "Add device".
- 3 Select "Matter-compatible device".



**NOTE**

This option may be named differently depending on your smart home system. If necessary, look for the Matter logo.

- 4 Scan the Matter QR code on the device. Alternatively, you can use the 11-digit code for setup without a QR code.

Example Code:



**NOTE**

This code is unique and cannot be recovered. Protect it from loss or damage.

- 5 Wait until the setup is complete and the device appears in your smart home application.

## Troubleshooting

### **Status LED does not flash when battery is inserted.**

- Check battery polarity.
- Check the battery voltage.

### **Sensor cannot be paired with smart home ecosystem**

- Check that the sensor is operating in pairing mode. This is indicated by the flashing status LED. Please note that pairing mode is only active for 15 minutes. To restart pairing mode after 15 minutes, a soft reset must be performed.
- Check if the sensor has already been paired with another smart home system. If this is this case, you may generate a new setup code over the other smart home system. In order to reset the pairing, you may perform a soft reset if necessary.

### **The sensor is paired with the smart home ecosystem, but the smart home ecosystem displays it as unavailable**

- Check the battery.
- Check the signal strength by moving the sensor closer to the Border Router. This will help to eliminate radio interference.
- Repeat the Start-up process.
- Restart the Border Router or the smartphone.

### **Sensor reports incorrect status.**

- Repeat the calibration process.
- Check the correct installation position of the sensor using the instructions.





## Notes

**MACO near you:**  
[www.maco.eu/contact](http://www.maco.eu/contact)



This print document is revised regularly.  
The latest version is available at <https://www.maco.eu/assets/7596XX>  
or by scanning the QR code.

Created: 05 / 2025 - Changed: 23.05.2025  
Order no. 760031  
All rights reserved and subject to change.